

DH-HAC-HDBW1200EA

2MP IR HDCVI Fixed-focal Vandal-proof Dome Camera



* The parameters and datasheets below can only be applied to 1200-S6 series.

- Max. 30 fps@1080p.
- Smart IR Illumination.
- 40 m illumination distance.
- Super Adapt.
- 3.6 mm fixed lens (2.8 mm optional).
- CVI/CVBS/AHD/TVI switchable.
- IP67, IK10, 12 VDC.

System Overview

The Lite Series is a great choice for consumers looking for high quality monitoring products at a reasonable price. Its low cost and high performance make it ideal for residential areas and SMB solutions. This series is equipped with a wide range of technologies, such as full-color and starlight, providing various solutions for different scenarios.

Functions

Super Adapt

With its intelligent algorithm, the camera automatically adjusts its parameters to provide optimal performance and vivid images.

Advanced 3DNR

Dahua's advanced 3DNR technology reduces image noise with little to no impact on image sharpness, especially in poor lighting conditions. It detects the noise, and compares the sequential frames to effectively reduce the noise. It also makes efficient use of bandwidth, saving on storage space.

Smart IR Illumination

With its IR illumination, the camera provides optimal performance in low light conditions, ensuring uniformity in the brightness of B/W images. Through its smart IR technology, the camera also compensates for the distance of targets by adjusting the intensity of its IR LEDs, preventing overexposure of images as targets move closer to the camera.

Protection (IP67, IK10, Wide Voltage)

IP67: The camera passed a series of rigorous dust and immersion tests. Its enclosure is both dust-proof and waterproof, and can function normally while being immersed in 1 m deep water for up to 30 minutes.
IK10: The enclosure can withstand up to 5 punches from a 5 kg hammer falling from a height of 40 cm (impact energy is 20 J).
Wide voltage: The camera has $\pm 30\%$ input voltage tolerance (for some power supplies) and a wide voltage range, making it suitable for a variety of outdoor scenarios.



4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.


* Audio input is available for select HDCVI camera models.

Long Distance Transmission

HDCVI technology provides long distance transmission in real time without transmission loss. It supports transmission distances up to 700 m for 2-MP/5-MP/8-MP HD videos through coaxial cables, and up to 300 m through UTP cables. The results were obtained and verified through rigorous testing in Dahua's test laboratory.

Technical Specification						BLC		BLC; HLC; DWDR	
Camera						WDR		DWDR	
Image Sensor		2 MP CMOS				White Balance		Auto; Area white balance	
Max. Resolution		1920 (H) × 1080 (V)				Gain Control		Auto	
Scanning System		Progressive				Noise Reduction		3D NR	
Electronic Shutter Speed		PAL: 1/25 s–1/100000 s NTSC: 1/30 s–1/100000 s				Illumination Mode		Smart IR	
Min. Illumination		0.01 lux@F2.0 (Color, 30 IRE) 0.001 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)				Mirror		Yes	
S/N Ratio		>65 dB				Privacy Masking		Off/On (8 areas, rectangle)	
Illumination Distance						Certification			
Illuminator On/Off Control		Auto				Certifications		CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035; FCC: 47 CFR FCC Part 15, Subpart B; UL: UL62368-1 + CAN/CSA C22.2 No. 62368-1-14	
Illuminator Number		3 (IR light)				Port			
Angle Adjustment		Pan: 0°–355° Tilt: 0°–80° Rotation: 0°–355°				Video Output		Video output choices of CVI/TVI/AHD/CVBS by one BNC port	
Lens						Power			
Lens Type		Fixed-focal				Power Supply		12 VDC ± 30%	
Lens Mount		M12				Power Consumption		Max 2.8 W (12 VDC, IR on)	
Focal Length		2.8 mm;3.6 mm				Environment			
Max. Aperture		F2.0				Operating Temperature		–40 °C to +60 °C (–40 °F to +140 °F)	
Field of View		2.8 mm: H: 102°; V: 60°; D: 129° 3.6 mm: H: 83°; V: 48°; D: 105°				Operating Humidity		<95% (RH), non-condensing	
Iris Control		Fixed				Storage Temperature		–40 °C to +60 °C (–40 °F to +140 °F)	
Close Focus Distance		2.8 mm: 0.5 m (1.64 ft) 3.6 mm: 0.7 m (2.30 ft)				Storage Humidity		<95% (RH), non-condensing	
DORI Distance	Lens	Detect	Observe	Recognize	Identify	Protection		IK10; IP67	
	2.8 mm	41.4 m (135.83 ft)	16.5 m (42.13 ft)	8.3 m (27.23 ft)	4.1 m (13.45 ft)	Structure			
	3.6 mm	50.9 m (166.99 ft)	20.3 m (66.60 ft)	10.2 m (33.46 ft)	5.1 m (16.73 ft)	Casing Material		Metal	
						Product Dimensions		Φ112.0 mm × 89.1 mm (Φ4.41" × 3.51")	
						Net Weight		0.44 kg (0.97 lb)	
						Gross Weight		0.62 kg (1.37 lb)	
						Installation		Wall mount; ceiling mount; vertical pole mount	
Video									
Video Frame Rate		CVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; AHD: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; TVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; CVBS: PAL: 960H; NTSC: 960H							
Resolution		1080p (1920 × 1080); 960H (960 × 576/960 × 480)							
Day/Night		Auto(ICR)/Color/B/W							

Ordering Information		
Type	Model	Description
2MP Camera	DH-HAC-HDBW1200EAP	2MP IR HDCVI Fixed-focal Vandal-proof Dome Camera, PAL
	DH-HAC-HDBW1200EAN	2MP IR HDCVI Fixed-focal Vandal-proof Dome Camera, NTSC
Accessories (Optional)	PFA136	Junction Box
	PFA106	Mount Adapter
	PFB220C	Ceiling Mount Bracket
	PFB203W	Wall Mount Bracket
	PFA152-E	Pole Mount Bracket
	PFB305W	Wall Mount Bracket
	PFA151	Corner Mount Bracket
	PFM800-E	1 Channel Passive HDCVI Balun
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

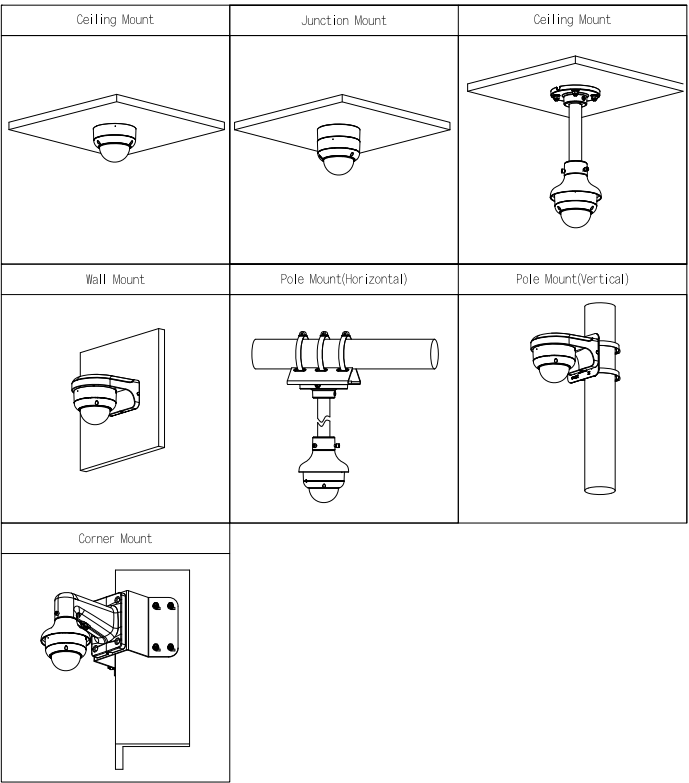

Accessories

Optional:



PFA136
Junction
Box



Mount
Adapter



PFB220C
Ceiling Mount
Bracket



PFB203W
Wall Mount
Bracket



PFA152-E
Pole Mount
Bracket



PFB305W
Wall Mount
Bracket



PFA151
Corner Mount
Bracket



1 Channel Passive
HDCVI Balun



PFM321D
12V 1A Power
Adapter



PFM904
Integrated Mount
Tester

Dimensions (mm [inch])

