

DHI-VTM416

Lift Controller



Features

- Connects with up to 2 RS-485 readers and 1 Wiegand reader.
- 6 alarm inputs and 2 alarm outputs.
- Stores up to 30,000 alarm records and logs.
- All the floor permissions will be temporarily relaxed if a fire alarm is triggered.
- Supports being remotely controlled through the webpage.

Technical Specification

Model	DHI-VTM416
-------	------------

System

Main Processor	ARM Cortex M4@180MHz
Communication Type	TCP/IP; RS-485, and Wiegand

Indicator

Power Indicator	1
Communication Indicator	1
Relay Indicator	16


Interface

Alarm In	6 (Alarm_in_1 for fire alarm)
Alarm Out	2
RS485	4 RS-485 1: Card reader or call lift module RS-485 2: Card reader or call lift module RS-485 3: Cascade with sub lift controller RS-485 4: Call lift module
Wiegand	1
Relay Out	16

General


Installation	Fixed onto the wall; U-shaped guide rail
Power	12 VDC, 2 A Standard PoE
Working Temperature	-10°C to +55°C
Relative Humidity	10%–90% (RH)
Dimensions	210 mm × 116 mm × 29 mm (8.27" × 4.57" × 1.14")
Weight	1.0 kg (2.20 lb)

Dimensions

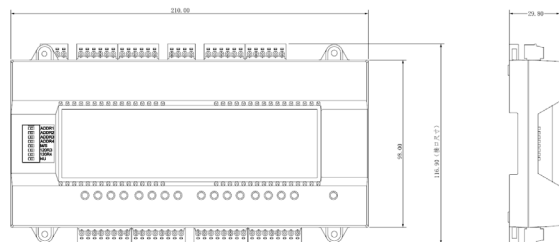


Device Mounting

Mounting way 1:
fix the whole device onto the wall with screws.



Mounting way 2:
mount U-shaped guide rail, and hang the whole device onto the wall.

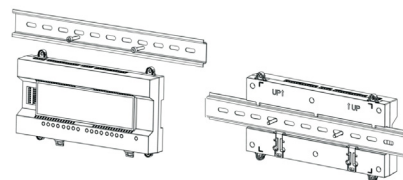

Application

