

Server-R450-4310*1-16G*1-2T*1-6 Gigabit port-Win Server 2022



Technical Specification

Appearance and Dimensions

Appearance	1U rack
Dimensions	748.79mm×482.0mm×42.8mm (29.47"×18.98"×1.69") (L×W×H, suspension loop included)

System

Main Processor	One 12-core Intel Xeon 4310 processor
Operating System	Windows Server 2022
Controller	Single controller
RAM	16GB*1 DDR4, up to 1TB, ECC memory
Power Redundancy	1+1 redundant power
RAID Controller	PERC H355 Controller

Port

Network	6 Gigabit ports
VGA	2
USB	1*USB2.0 2*USB3.0 ports

Hard Drive


Quantity of Hard Drive	Standard: One 3.5-inch SATA 2TB enterprise-level HDD
------------------------	--

General

Power Supply	800W high efficiency platinum edition 110V–240V AC
Power Consumption	< 600 W
Operating Temperature	5°C to +40°C (+41°F to +104°F)
Operating Humidity	8%–85% (RH), no condensing
Storage Temperature	–40°C to +65°C (–40°F to +149°F)

Storage Humidity	5%–95% (RH), no condensing
Operating Altitude	Up to 3048 m (10000 ft)
Net Weight	18.62 kg (41.05 lb)
Gross Weight	31.7 kg (69.74 lb)
Installation	Standard 19-inch rack-mounted, with mounting guide rail

Dimensions (mm[inch])

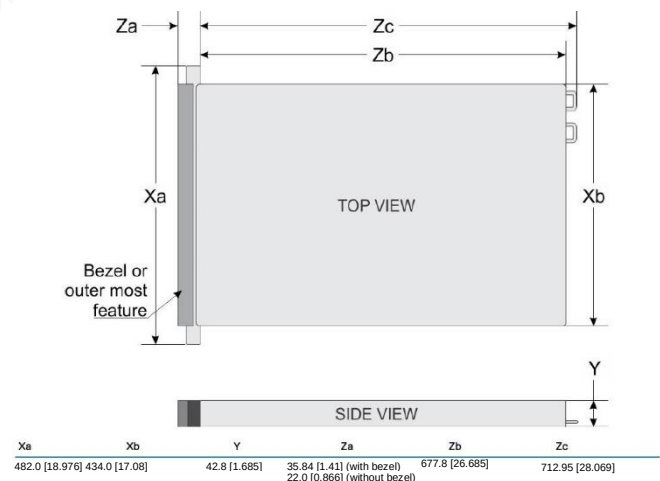

Rev 001.001

© 2020 Dahua. All rights reserved. Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.