




Video Balun SINGLE CHANNEL

Attention

1. Network cable conductor is copper, and it shall conform to international CAT5E standard or CAT6 electrical performance standard.
2. Adjust the saturation of DVR to make image transmission distance be farther.
3. Adjust the saturation of DVR in case of no image or unrecognizable image.
4. Do not use this product outdoors because it is non-waterproof.
5. Do not connect the power supply to avoid the passive transmitter being burnt!



Wiring

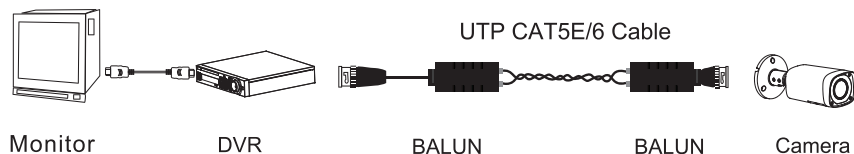

Specifications

Transmission Properties

Video Transmission Distance	HDCVI——720P: Max. 400m; 1080P: Max. 250m; 4MP/4K: Max. 180m;
	TVI——720P: Max. 250m; 1080P: Max. 250m; 4MP/5MP: Max. 180m;
	AHD——720P: Max. 400m; 1080P: Max. 250m; 4MP/5MP: Max. 180m;
Compatible Format	HDCVI/AHD/TVI/CVBS
Resolution	720P/1080P/4M/5M/6M/4K
Category Type	UTP CAT5E/6 (material: CU)

Protection

ESD	1a contact discharge electricity level 3, 1b air discharge electricity level 3, Per: IEC61000-4-2
UTP Cable Connector	4KV(common-mode), 2KV (different-mode), Per: IEC61000-4-5

Physical Properties

Dimension(L*W*H)	49.1mm×19.5mm×21mm ,193.8mm×19.5mm×21mm
Shell	ABS
Net Weight	34g

Stability

MTBF	>10000H
------	---------

Environmental

Operating Temperature	-30℃~+70℃(-22°F~158°F)
Storage Temperature	-40℃~+80℃(-40°F~176°F)
Humidity	0~95%(non-condensing)



6 937552 428942

This device complies with part 15 of the FCC Rule.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.



MADE IN CHINA