



Passive HDCVI Balun



SINGLE CHANNEL

Item	Specification
Properties	Transmission Signal
	1 Channel
	720P:400M(max) 1080P: 250M (max)
Video Transmission Properties and Port	Category Type
	UTP CAT 5E/6 (R < 10Ω/100M)
	Coaxial Video Connector
	BNC-M
	Twisted-pair Video Connector
	Push-terminal
Protection	Compatible Format
	HDCVI
	Resolution
	720P/1080P
Impedance	Anti-interference
	>60db
	ESD
	1a contact discharge electricity level 3
	1b air discharge electricity level 3
Coaxial Cable Connector	Per: IEC61000-4-2
	2KV(common-code) Per: IEC1000-4-5
	UTP Cable Connector
	2KV(different-code),4KV (common-code),Per: IEC1000-4-5
UTP Cable	BNC Male
	75 ohms
UTP Cable	UTP Cable
	100 ohms

Item	Specification
Physical Properties	Dimension (L*W*H)
	35*19*16 mm
	Shell
	ABS
Stability	Color
	Black
Environmental	N. W.
	21g
	MTBF
	>10000H
Humidity	Operating Temperature
	-10-55°C
	Storage Temperature
	-20-70°C
Humidity	Humidity
	0-95% (non-condensing)

To Coaxial Cable

To UTP Cable

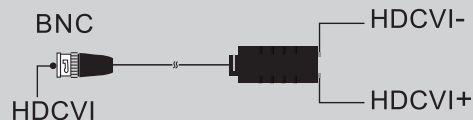

HDCVI CAMERA




BALUN

UTP CAT 5E/6



BALUN



HDCVI DVR

UK
CA
CE
MADE IN CHINA

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.



6 923172 519320