




Intelligent Living

Wireless Alarm Kit

CODE: QR-ALARM-KIT1

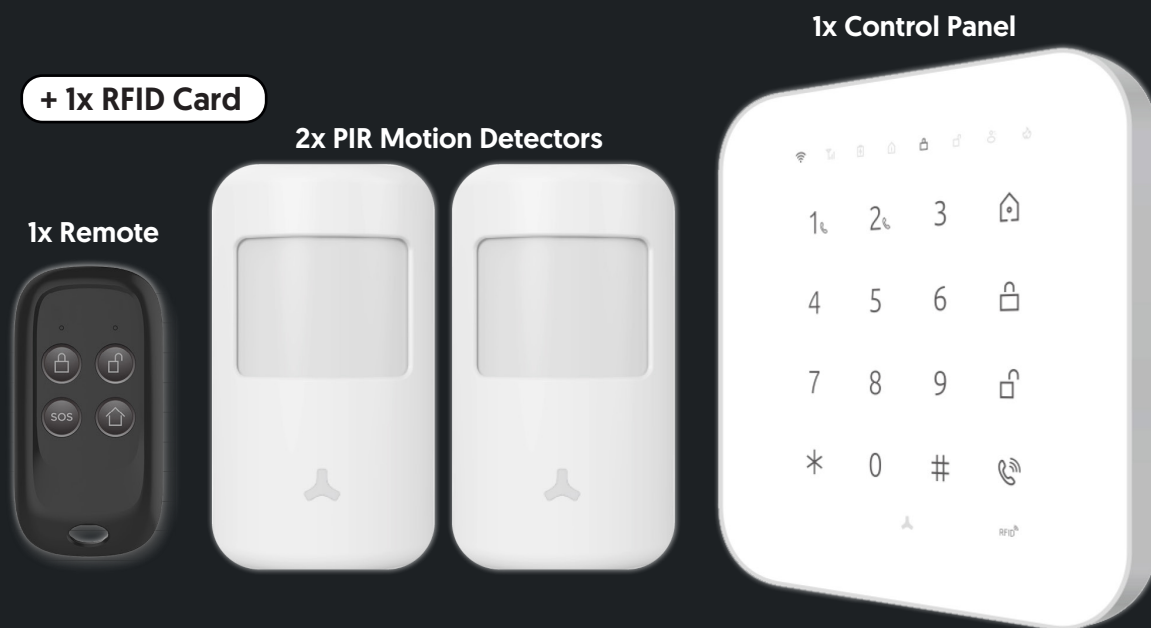

Specification	QR-ALARM-KIT1
PIR Motion Detectors	
Power Supply	DC 3V [2pcs of AAAA, LR61 Battery]
Standby Current	$\leq 50\mu\text{A}$
Alarm Current	$\leq 12\text{mA}$
Detection Area	7-8m/110°
Wireless Transmission Distance	$\leq 80\text{m}$ [in open area]
Wireless RF Frequency	FHSS 433MHz
Temperature/Humidity	-10°C~55°C/≤80% [Non-condensing]
Detector Dimensions [LxWxH]	90 x 52 x 36.5mm
Bracket Dimensions [LxWxH]	48 x 26 x 29mm
Control Panel	
Power Supply	Input: AC 110-240V/50-60HZ Output: DC 12V/1000mA
GSM Working Frequency	2G: GSM 850/900/1800/1900 3G: WCDMA 850/900/1900/2100
Alarm Maximum Current	$\geq 350\text{mA}$

Wireless Alarm Kit


CODE: QR-ALARM-KIT1



Specification	QR-ALARM-KIT1
Control Panel	
Internal Battery Backup	Lithium Battery: 3.7V/900mAh
Internal Siren	90dB
Max. Capacity of Wireless Accessories	10pcs remote controls 50pcs wireless accessories
Operating Frequency	2.400~2.4835GHz
Wi-Fi Standards	802.11b/g/n
Wireless Transmission Distance	≤80m (in open area)
Wireless RF Frequency	FHSS 433MHz
Housing Material	ABS Plastic
Temperature/Humidity	-10°C~55°C/≤80% (Non-condensing)
Panel Dimensions (LxWxH)	180 x 126 x 26mm
Remote Control	
Power Supply	DC 3V (1pc CR2032 button cell battery)
Transmission	≤6mA
Housing Material	ABS Plastic
Wireless Transmission Distance	≤80m (in open area)
Wireless RF Frequency	FHSS 433MHz
Temperature/Humidity	-10°C~55°C/≤80% (Non-condensing)
Remote Dimensions (LxWxH)	35 x 70 x 12mm
RFID Cards	
Frequency	125k



QLS APP



- ACCESS HOW-TO VIDEOS
- GET WHATSAPP SUPPORT
- VIEW PRODUCT INFORMATION