

DH-PTZ4M231-HNR-XA-GHW

2MP 31x Starlight IR WizMind PTZ Network Camera



Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customers requirements, WizMind provides precise, reliable and comprehensive AI solutions for industry verticals.

System Overview

WizMind PTZ products adopt the most advanced AI technologies, including deep learning algorithms that primarily target people and vehicles, which provides higher flexibility and accuracy for end-users. This enables the Dahua WizMind series to offer various advanced applications such as Face Recognition, ANPR, Metadata, People Counting, traffic data statistics, etc. The complete lineup of Dahua WizMind includes network (PTZ) cameras, network video recorders, servers, and more devices. Beyond seeing the world, the power of WizMind allows devices to perceive the environment and understand the world in a better way.

Functions

Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

Starlight Technology

For challenging low-light applications, Dahua's Starlight Ultra-low Light Technology offers best-in-class light sensitivity, capturing color details in low light down to 0.005 Lux. The camera uses a set of optical features to balance light throughout the scene, resulting in clear images in dark environments.

PFA Technology

PFA technology has innovatively introduced new methods of judgment to ensure the accuracy and predictability of the direction of subject distance adjustment. The result is a set of advanced focusing algorithms. PFA ensures clarity of the image throughout the process of zooming and shortens focus time. The realization of PFA technology substantially improves user experience and increases product value.

- 1/1.8" 2Megapixel STARVIS™ CMOS
- 31× optical zoom
- Starlight+ technology
- Max. 25/30 fps@1080p
- IR distance up to 100 m
- Auto-tracking
- Perimeter protection
- Face detection
- Construction monitoring
- SMD Plus
- GPS positioning, displaying accurate longitude and latitude
- Dual 4G (SIM 1/SIM 2)
- Dual SD card expansion (TF1/TF2)
- Bluetooth, Wi-Fi (2.4G/5G), AP (2.4G/5G)



Environment

Dahua cameras can operate in extreme temperature environments, rated for use in temperatures from -20 °C to +55 °C (-4 °F to +131 °F) with 95% humidity. Subjected to rigorous dust and water immersion tests and certified to the IP66 Ingress Protection rating makes it suitable for demanding outdoor applications.

Wide Dynamic Range

The camera achieves vivid images, even in the most intense contrast lighting conditions, using industry-leading wide dynamic range (WDR) technology. For applications with both bright and low lighting conditions that change quickly, True WDR (120 dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Video Metadata

Metadata is attribute information extracted from a target which can be used for data retrieval. There are four kinds of metadata supported by Dahua PTZ WizMind cameras: Human face, human body, motor vehicle and non-motor vehicle. Facial information includes gender, age, glasses, masks, beards, etc. Human body information includes hat, top, top color, bottom, bottom color, bag, etc. Motor vehicle information includes plate color, type, vehicle color, sunshield, ornament, calling, seatbelt, smoking, annual inspection sticker, etc. Non-motor vehicle information includes type, color, top type, top color, people number, etc.

Face Detection

Face detection; tracking; optimization; capturing pictures; uploading high-quality face snapshots; face enhancement; attribute extraction; 6 attributes and 8 expressions.

Construction Monitoring

Helmet detection; helmet color recognition; workwear detection; lone working detection; absence detection.

Auto-tracking

This feature controls the pan/tilt/zoom actions of the camera to automatically track an object in motion and to keep it in the scene. The tracking action can be triggered manually or automatically by defined rules. Once a rule is triggered, the camera can zoom in and track the defined target automatically.

Scene

The product can be widely used in low-light places that need large-scale high-speed monitoring, have high requirements for image quality, and need to see all kinds of details of the target, such as rivers, forests, roads, airports, lookout posts, squares, parks, scenic areas, streets, stations, large venues, and the periphery of residential areas.

Technical Specification

Camera

Image Sensor	1/1.8" CMOS
Pixel	2MP
Max. Resolution	1920 (H) × 1080 (V)
ROM	4 GB
RAM	1 GB
Electronic Shutter Speed	1/1 s–1/30,000 s
Scanning System	Progressive
Min. Illumination	Color: 0.001 Lux@F1.6 B/W: 0.0001 Lux@F1.6 0 Lux (IR light on)
Illumination Distance	100 m (328.08 ft) (IR)
Illuminator On/Off Control	Zoom Prio; Manual; Smart IR; Off
Illuminator Number	3 (IR light)

Lens

Focal Length	6 mm–186 mm			
Max. Aperture	F1.6–F4.0			
Field of View	H: 59.8°–2.8°; V: 33.7°–1.9°; D: 63.3°–4°			
Optical Zoom	31×			
Focus Control	Auto; Semi-Auto; Manual			
Close Focus Distance	0.5 m–7 m (1.64 ft–22.97 ft)			
Iris Control	Auto; Manual			
DORI Distance	Detect	Observe	Recognize	Identify
	2565.5 m (8416.99 ft)	1013.4 m (3324.80 ft)	513.1 m (1683.40 ft)	256.6 m (841.86 ft)

PTZ

Pan/Tilt Range	Pan: 0° to 360° endless Tilt: -90° to +30°, auto flip 180°
Manual Control Speed	Pan: 0.1°/s–118°/s Tilt: 0.1°/s–68.2°/s
Preset Speed	Pan: 169°/s Tilt: 160°/s

Preset	300
Tour	8 (up to 32 presets per tour)
Pattern	5
Scan	5
Power-off Memory	Yes
Idle Motion	Preset; tour; pattern; scanning
PTZ Protocol	DH-SD Pelco-P/D (auto recognition)

Intelligence

Smart Capture	Support human, motor vehicle and non-motor vehicle image capture.
IVS (Perimeter Protection)	Tripwire and intrusion. Support alarm triggering by target types (human and vehicle). Support filtering false alarms caused by animals, rustling leaves, bright lights, etc.
Face Detection	Yes
Construction Monitoring	Helmet detection; helmet color recognition; workwear detection; lone working detection; absence detection
Auto Tracking	Yes

Video

Video Compression	H.265; H.264B; H.264M; H.264H; MJPEG; Smart H.265+; Smart H.264+
Streaming Capability	3 streams
Resolution	1080p (1920 × 1080); 960p (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); CIF (352 × 288/352 × 240)
Video Frame Rate	Main stream: 1920 × 1080@25 fps/1280 × 960@25 fps/1280 × 720@25 fps Sub stream 1: 704 × 576@25 fps/352 × 288@25 fps Sub stream 2: 1920 × 1080@25 fps/1280 × 960@25 fps/1280 × 720@25 fps
Bit Rate Control	CBR; VBR
Video Bit Rate	Default resolution of the main stream: H.264: 32 Kbps–8192 Kbps H.265: 32 Kbps–8192 Kbps
Day/Night	Auto (ICR); Color; B/W
BLC	Yes
WDR	DWDR
HLC	Yes
White Balance	Auto; Indoor; Outdoor; Tracking; Manual; Sodium lamp; Natural light; Street lamp
Gain Control	Auto; Manual
Noise Reduction	Ultra DNR(2D/3D)
Motion Detection	Yes
Region of Interest (RoI)	Yes
Image Stabilization	Electronic Image Stabilization (EIS)
Defog	Electronic
Digital Zoom	16×
Image Rotation	180°

Privacy Masking	Up to 24 areas can be set, with up to 8 areas in the same view; color block and mosaic selectable
S/N Ratio	> 55 dB

Audio

Audio Compression	G.711a; G.711Mu; G.726; AAC; MPEG2-Layer2; G722.1; G729; G723
-------------------	---

Network

Network Port	RJ-45 (10/100 Base-T)
Wi-Fi	Yes
Wi-Fi–Wireless Standard	IEEE 802.11 a/b/g/n/ac
Wi-Fi–Wireless Transmission Rate	433 Mbps
4G	Yes
4G–Wireless Frequency Range	4G_LTE(FDD): B1/B2/B3/B4/B5/B7/B8/B20 3G_WCDMA/HSDPA/HSUPA/HSPA+: Band 1/ 2/5/8 2G_GSM/GPRS/EDGE: 850/900/1800/1900 MHz
Network Protocol	IPv4; IPv6; HTTP; HTTPS; 802.1x; QoS; FTP; SMTP; UPnP; SNMP; DNS; DDNS; NTP; RTSP; RTP; TCP; UDP; IGMP; ICMP; DHCP; PPPoE; ARP; SNMPv1/v2c/v3(MIB-2); RTCP; RTMP
Interoperability	ONVIF (Profile S/Profile G); CGI
Streaming Method	Unicast; Multicast
User/Host	20 (Total bandwidth 64 MB)
Storage	FTP; Micro SD card (max. 1 T); NAS
Browser	IE7 and later versions Chrome 42 and earlier versions Firefox 52 and earlier versions Safari
Management Software	Smart PSS; DSS; DMSS; Easy4ip; IVSS
Mobile Client	IOS; Android

Function

Others	Dual SIM cards Dual SD cards Access point Bluetooth On-screen status display
--------	--

Certification

Certifications	CE; FCC
----------------	---------

Port

RS-485	1 (1200 bps–9600 bps)
Audio Input	1
Audio Output	1
Two-way Audio	Yes
Alarm Input	1 (on-off value input: 0–5 V DC)
Alarm Output	1
Alarm Linkage	Capture; preset; tour; pattern; recording; triggering on-off value output; audio; sending email
Alarm Event	Motion/tampering detection; audio detection; network disconnection detection; IP conflict detection; memory card state detection; memory space detection; power exception detection

Power

Power Supply	12 V DC/5 A ± 15% (included)
Battery Life on a Full Charge	11 h
Power Consumption	Basic: 9 W Max.: 32 W (illuminator on, battery charging, PTZ working)

Environment

Operating Temperature	–20 °C to +55 °C (–4 °F to +131 °F)
Operating Humidity	≤ 95%
Protection	IP66; TVS 6000V lightning proof; surge protection; voltage transient protection

Structure

Casing	ADC12; AZ91D
Product Dimensions	Φ160 mm × 265 mm (Φ6.30" × 10.43")
Net Weight	3.7 kg (8.15 lb)
Gross Weight	13 kg (28.66 lb)

Ordering Information

Type	Model	Description
2M Camera	DH-PTZ4M231-HNR-XA-GHW	2MP 31x Starlight IR WizMind PTZ Network Camera, PAL
	DH-PTZ4M231N-HNR-XA-GHW	2MP 31x Starlight IR WizMind PTZ Network Camera, NTSC
	PTZ4M231-HNR-XA-GHW	2MP 31x Starlight IR WizMind PTZ Network Camera, PAL
	PTZ4M231N-HNR-XA-GHW	2MP 31x Starlight IR WizMind PTZ Network Camera, NTSC
Accessories		Aluminum Trolley Case
		Mounting Plate
		Power Adapter
		Power Cord
		12-core Aviation Connector Cable
		Steel Wire Rope
		Battery
	SDPH001	Backup Battery
	SDPH002	8-core Aviation Connector Cable (audio, alarm, power supply)
	SDPH003	Tripod
	SDPH004	Base Charger

Accessories

Included:



Aluminum Trolley Case



Mounting Plate



Power Adapter



Power cord



12-core Aviation
Connector Cable



Steel Wire Rope



Battery

Optional:



SDPH001
Backup Battery




SDPH002
8-core Aviation
Connector Cable (audio,
alarm, power supply)



SDPH003
Tripod



SDPH004
Base Charger

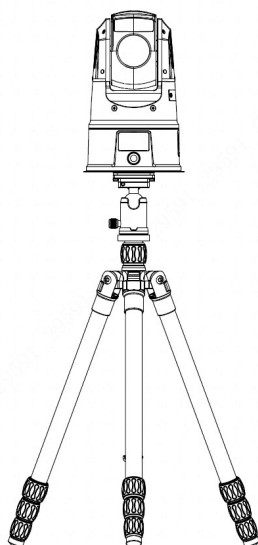

Dimensions (mm[inch])

