

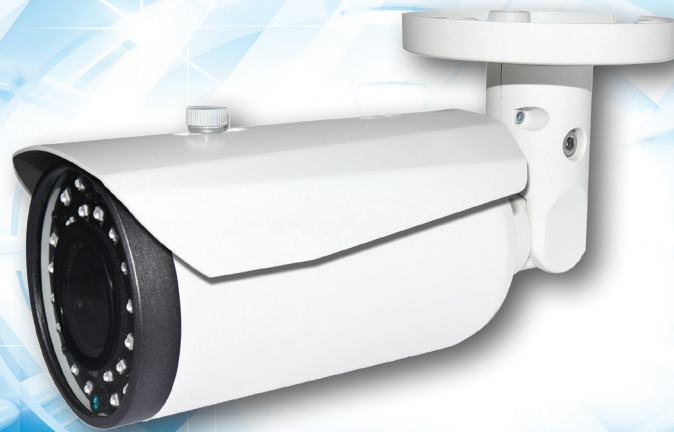





λ C O R T E X | 3MP NETWORK LICENSE PLATE RECOGNITION

FEATURES:

- 60FPS@2M / 30FPS@3M video output
- Less than 90km/h
- Support license plate number recognition
- 1/2.8" SONY CMOS, No sawtooth when fast moving
- Dual stream support (Stream rate: 20Kb-10M, Default stream rate 4M)
- 9-22mm Auto IRIS Motorized Varifocal IR Lens, 42 Pcs SMD LED, Available IR Distance:2-15m
- ONVIF Profile S and Milestone Support, SDK available
- True Day/ Night Operation: IR Cut Filter (ICR)
- IP66 compliant
- Storage: NVR, VMS
- Power Supply: DC12V±10%

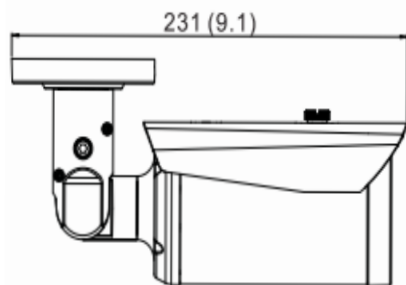

SPECIFICATION

CAMERA	C-LP-BULLET-3MP
Image Sensor	Progressive Scan CMOS
IP Rating	IP66
Filter	Removable IR Cut Filter
Lens	9-22mm Motorised Varifocal IR Lens
Min.Illumination	0Lux
Resolution	2048(H)×1536(V)
Electronic Shutter	1/2000s
Available IR Range	2-15M(6.56-49.2ft)
Function	
Storage	NVR, Software VMS
Video Type	Manual, Timing, Motion Detection, Alarm Video
Alarm Triggers	Motion Detection, alarm
Alarm Event	Snapshot, Video, Alarm Output, Email Upload, PTZ Drive
System/Explorer Support	Windows XP, Windows 7, IE7.0 and above
General Function	Flashing, True WDR, DWDR,3DNR, Mirror, Watermark Overlay,Camera angle
VIDEO	
Compression	H.264/ H.265
Transmission Stream Rate	Dual Stream (Code Rate:20Kb~10M, Default Code Rate:4M)
Frame Rate	Main Stream:1~25fps(PAL),1~30fps(NTSC) Sub Stream:1~25fps(PAL),1~30fps(NTSC)
NETWORK	
Protocol	TCP/IP, UDP, SMTP, PPPoE, DDNS, SNTP, DHCP, FTP, uPnP, RTSP, HTTPS, IPv6
Network Support	ONVIF Profile S,SDK,Milestone
Max. User Access	10 users
Network Interface	RJ45*1 10M/100M
GENERAL	
Power Supply	DC12V±10%
Power Consumption	770mA(Max)
Storage Temperature	-30°C~+60°C
Operating Temperature	-30°C~+45°C
Dimensions	231×84×110mm(9.1" ×3.3"×4.3")
Weight	820g (28.92oz.)