



PRODUCT CODE

GJD840R D-TECT Ricochet 40m Detector

UNIQUE FEATURES

Ricochet enabled

Up to 16 x 32 XP-W expanders can be used with Premier Elite 640 control panel allowing up to 510 wireless devices to be connected

Multiple systems may be installed on the same site

END USER BENEFITS

3 ranges to choose from

Covert detection

Energy efficient

Low maintenance

Aesthetically pleasing design

D-TECT R *Ricochet®* Enabled

RANGE OF WIRELESS DETECTORS WITH RICOCHET® MESH TECHNOLOGY


D-TECT R Ricochet® enabled BS8418 compliant detectors all feature quad PIR detector modules, stylish IP65 fully tampered housings with discreet internal antenna.

Units accept 2 x CR123 batteries, 150m line of sight RF transmission range on 868MHz and pairing to Texecom's Premier Elite control panels (with firmware V2.08 and above).



IMPORTANT INFORMATION: To fully utilise the GJD D-TECT unit with Texecom Ricochet monitoring software, please upgrade your monitoring software via Texecom website to the version 2.8.10 or later.

DIMENSIONS

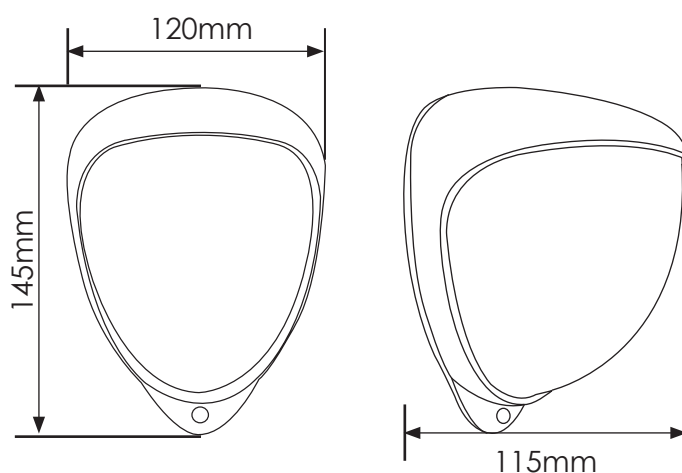

SECTORS



RESIDENTIAL



COMMERCIAL



INDUSTRIAL



BORDERS



MILITARY BASES



PORTS



POWER PLANTS



HERITAGE



AIRPORTS



PRISONS

RICOCHET® Wireless Technology

Introducing the next generation of wireless security. Texecom's award winning Ricochet mesh networking wireless technology, coupled with GJD's movement detection, delivers an exceptional security solution.

Ricochet enabled wireless devices receive and repeat wireless transmissions from other devices. The size, scalability and range of the entire system is extended as wireless signalling is no longer limited by point to point communications.

Each Ricochet enabled wireless device signalling routes to and from Texecom Premier Elite control panels (with firmware V2.08 and above). Should wireless connection between the two weaken, the network will 'self-heal' and automatically re-route communications via alternate Ricochet enabled devices.


THE D-TECT RICOCHET RANGE OF WIRELESS DETECTORS INTEGRATE FULLY WITH THE TEXECOM PREMIER ELITE CONTROL PANELS WITH FIRMWARE V2.08 AND ABOVE.



TECHNICAL	GJD 840R
Transmission Range	150m line of sight
Detection Range	40m x 4m & 40m x 8m
Detector Orientation	180° pan & 90° tilt
Mounting Height	Up to 4m - Optimum 3m
Tamper Switches	Front & rear tamper switches: case open and removal from wall
Power Input	*2 x CR123 Lithium batteries
Pulse Count	1 - 2
Housing & IP Rating	High Impact ABS IP65



*Batteries not included

BEAM COVERAGE GJD830R

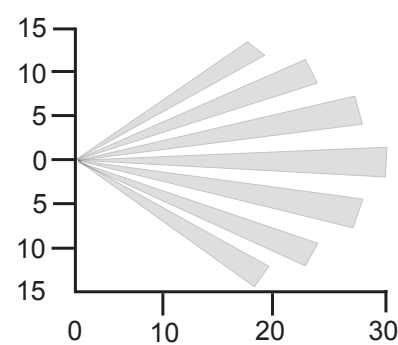


BEAM PATTERN SET TO MAXIMUM RANGE

MULTI-BEAM OPTIMUM
HEIGHT 3 METRES
RANGE MAXIMUM
MODULE TILT 0 DEGREE



PET IMMUNITY
HEIGHT 1.5 METRES
RANGE MAXIMUM
MODULE TILT -2 DEGREE



CURTAIN COVERAGE
HEIGHT 6 METRES
RANGE MAXIMUM
MODULE TILT 45 DEGREE

