


ECU-224 interface/network card. Allows an ECU-224 desk controller to be connected to an ECU-4, 8 or 16. Can also act as a network card if network required. NOT compatible with ECU-8NT Controllers.

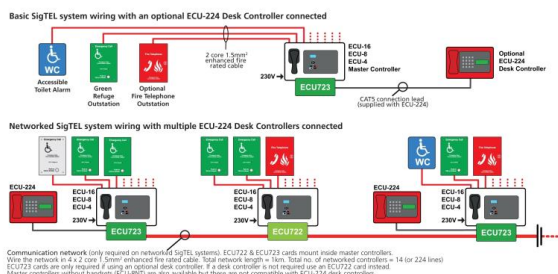

Overview

An optional system expansion device.

Allows an ECU-224 desk controller to be connected to an ECU-4, 8 or 16 SigTEL controller to simplify call handling on larger SigTEL applications.

Mounts inside an ECU-4, 8 or 16 (can also be used to network the ECU-4, 8 or 16 to another controller if required).

Not compatible with ECU-8NT controllers.

See schematic/full instructions for further details.

Technical Specifications

Network connection	The ECU723 transmits speech via a single wiring loop and digital data via two linear RS485 networks. The network should be connected using 4 x 2-core 1.5 mm² enhanced fire-rated cable. Max. length of all networks is 1 km.
Connections	Cat 5 patch lead (supplied) connects the ECU723 to a master controller. The ECU-224 desk controller also connects to the ECU723 via a Cat 5 lead.
Product dimensions (mm)	92 W x 108 H x 20 D mm.
Weight	56g.
Notes	We recommend two separate cable paths be run with each path containing a single speech and single data cable (which should not be mixed in the same cable). Download main ECU-4/8/16 Instructions below for further details.