


18-PORT PoE+ SWITCH (16x PoE)

Titus

CODE: TD-POESWITCH-POE16

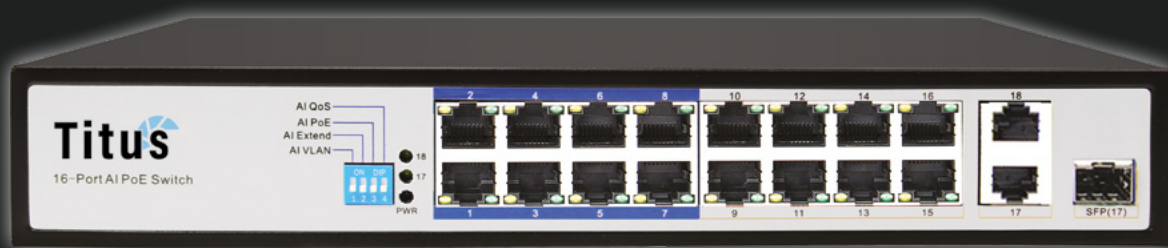

PoE Ports	16x 10/100Mbps PoE-Enabled RJ45 Ports (Numbered 1 to 16)
Non-PoE Ports	2x 10/100/1000 Mbps Uplink Non-PoE RJ45 Ports (Numbered 17 to 18); (1 Can Work as a Combo Port with SFP Fiber Port)
SFP Fiber Port	1x Gigabit SFP Fiber Port
Network Protocol Standards	IEEE 802.3i; IEEE 802.3u; IEEE 802.3x; IEEE 802.3ab; IEEE 802.3af; IEEE 802.3at
VLAN Dip Switch	AI VLAN; AI Extend; AI PoE; AI QoS
Backplane Bandwidth	7.2Gbps (Non-Blocking)
Packet Forwarding Rate	5.4Mbps
MAC Address Table	2K
Forwarding Mode	Store & Forward
LED Indicator	Power LED; LINK/ACT Indicator; PoE Indicator
PoE Cable Core	1/2+; 3/6-
Power Support	30W Single Port; 150W Total
Working Temperature	0°C to +40°C (+32°F to +104°F)
Working Humidity	10% to 90% RH
Storage Temperature	-40°C to +70°C (-40°F to +158°F)
Storage Humidity	5% to 90% RH
Certifications	CE; RoHS; FCC; CCC