




QVIS® | HDMI IP EXTENDER 120M WITH IR

KEY FEATURES

- Supports 1080P@60Hz resolution and backward compatible
- Supports IR infrared return, allowing users to control the device remotely
- The HDMI signal can be transmitted to 120m using a single CAT5e/6 cable.
- More than 120m can be extended by the switch multi-level connection, one transmitter can connect to many receivers (up to 253 receivers).

SPECIFICATION	HDMI-7043
Desktop Computer	26AWG 15m 1920*1080@60Hz
Samsung TV	26AWG 15m 1920*1080@60Hz
Philips Blu-ray Machine	26AWG 15m 1920*1080@60Hz
Mango Player	26AWG 15m 1920*1080@60Hz
Dahua Hard Disk Recorder	24AWG 15m 1920*1080@60Hz
Power Adapter	DC 5V/1A
Super Five Network Cable	120 m*2
IR Line	1.2m
SL-881	24AWG 15m 1920*1080@60Hz
Electrostatic discharge voltage protection	±8kV
HDMI Transmitter Working Temperature	40°C ~ 75°C (room temperature 25°C)
HDMI Receiver Working Temperature	40°C ~ 75°C (room temperature 25°C)
Rated Input Voltage:	DC 5V
Rated Input Current	1000mA
The Transmitter	105mm*75mm*25mm
The Receiver	105mm*75mm*25mm

HDMI Transmitter - 25mm(h) x 75mm(l)

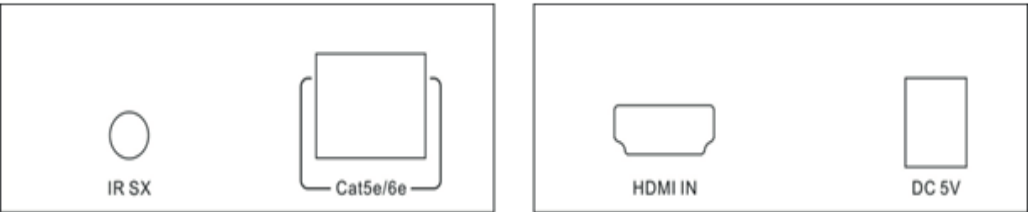

HDMI Receiver - 25mm(h) x 75mm(l)

