

PURETECH Lighting

Commercial Asymmetric Flood Light (Colour & Wattage Switchable, Photocell)

CODE: PTFLOOD3-20-30-50/WSTC



Flood Lights



Tri-Colour &
Wattage Switchable
Behind Access Cap

Wattage
Switchable

Integral
Photocell
(On/Off)

Tri-Colour
Switchable

1.5m Cable
Flex


Key Information

Power	Efficacy	Output	Colour Temperature
20W	140Lm/cW	2800Lm	Tri-Colour (2700K, 4000K & 6000K)
30W	140Lm/cW	4200Lm	
50W	140Lm/cW	7000Lm	

Additional Information

Input Voltage	AC 120-200V
CRI	>80
Beam Spread	80*150°
Power Factor	>0.95
Cable Flex	1.5m
Operating Temp.	-30°C to +45C
IP Rating	IP66
IK Rating	IK08
Materials	Aluminium & Glass
Lifetime	60,000 hours, L70-B10 (Ta 25°C)
Net Weight	1kg

Dimensions

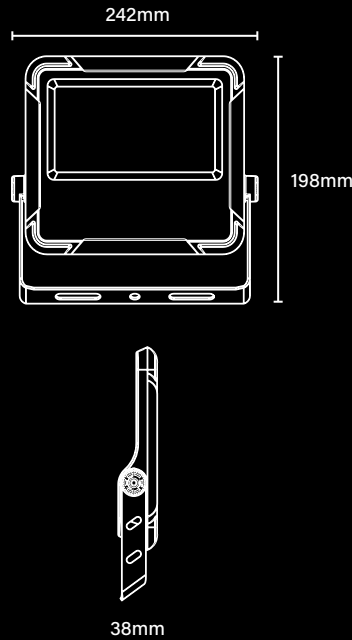

Photometric Data

