


Commercial Asymmetric Flood Light  
(Colour & Wattage Switchable)

CODE: PTFLOOD3-200-240-300/WSTC



Flood Lights

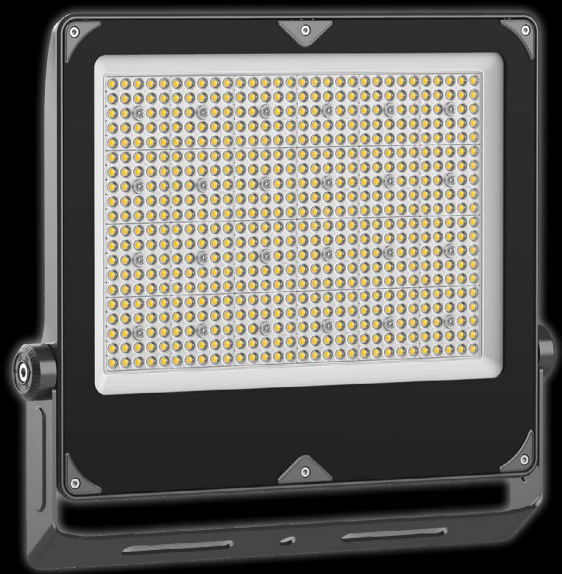

Tri-Colour &  
Wattage Switchable  
Behind Access Cap

Wattage  
Switchable

IP66 &  
IK08 Rated

Tri-Colour  
Switchable

1.5m Cable  
Flex


Key Information

| Power | Efficacy | Output  | Colour Temperature                |
|-------|----------|---------|-----------------------------------|
| 200W  | 140Lm/cW | 28000Lm | Tri-Colour (2700K, 4000K & 6000K) |
| 240W  | 140Lm/cW | 33600Lm |                                   |
| 300W  | 140Lm/cW | 42000Lm |                                   |

Additional Information

|                 |                                 |
|-----------------|---------------------------------|
| Input Voltage   | AC 120-200V                     |
| CRI             | >80                             |
| Beam Spread     | 80*150°                         |
| Power Factor    | >0.95                           |
| Cable Flex      | 1.5m                            |
| Operating Temp. | -30°C to +45C                   |
| IP Rating       | IP66                            |
| IK Rating       | IK08                            |
| Materials       | Aluminium & Glass               |
| Lifetime        | 60,000 hours, L70-B10 (Ta 25°C) |
| Net Weight      | 4.65kg                          |

Dimensions

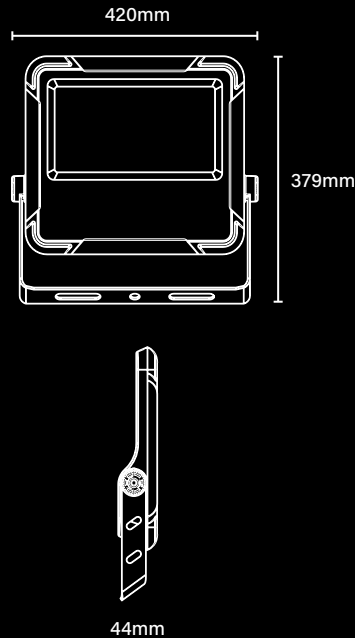

Photometric Data

