


Batteries

Internal batteries to install into Hub BP Jeweller

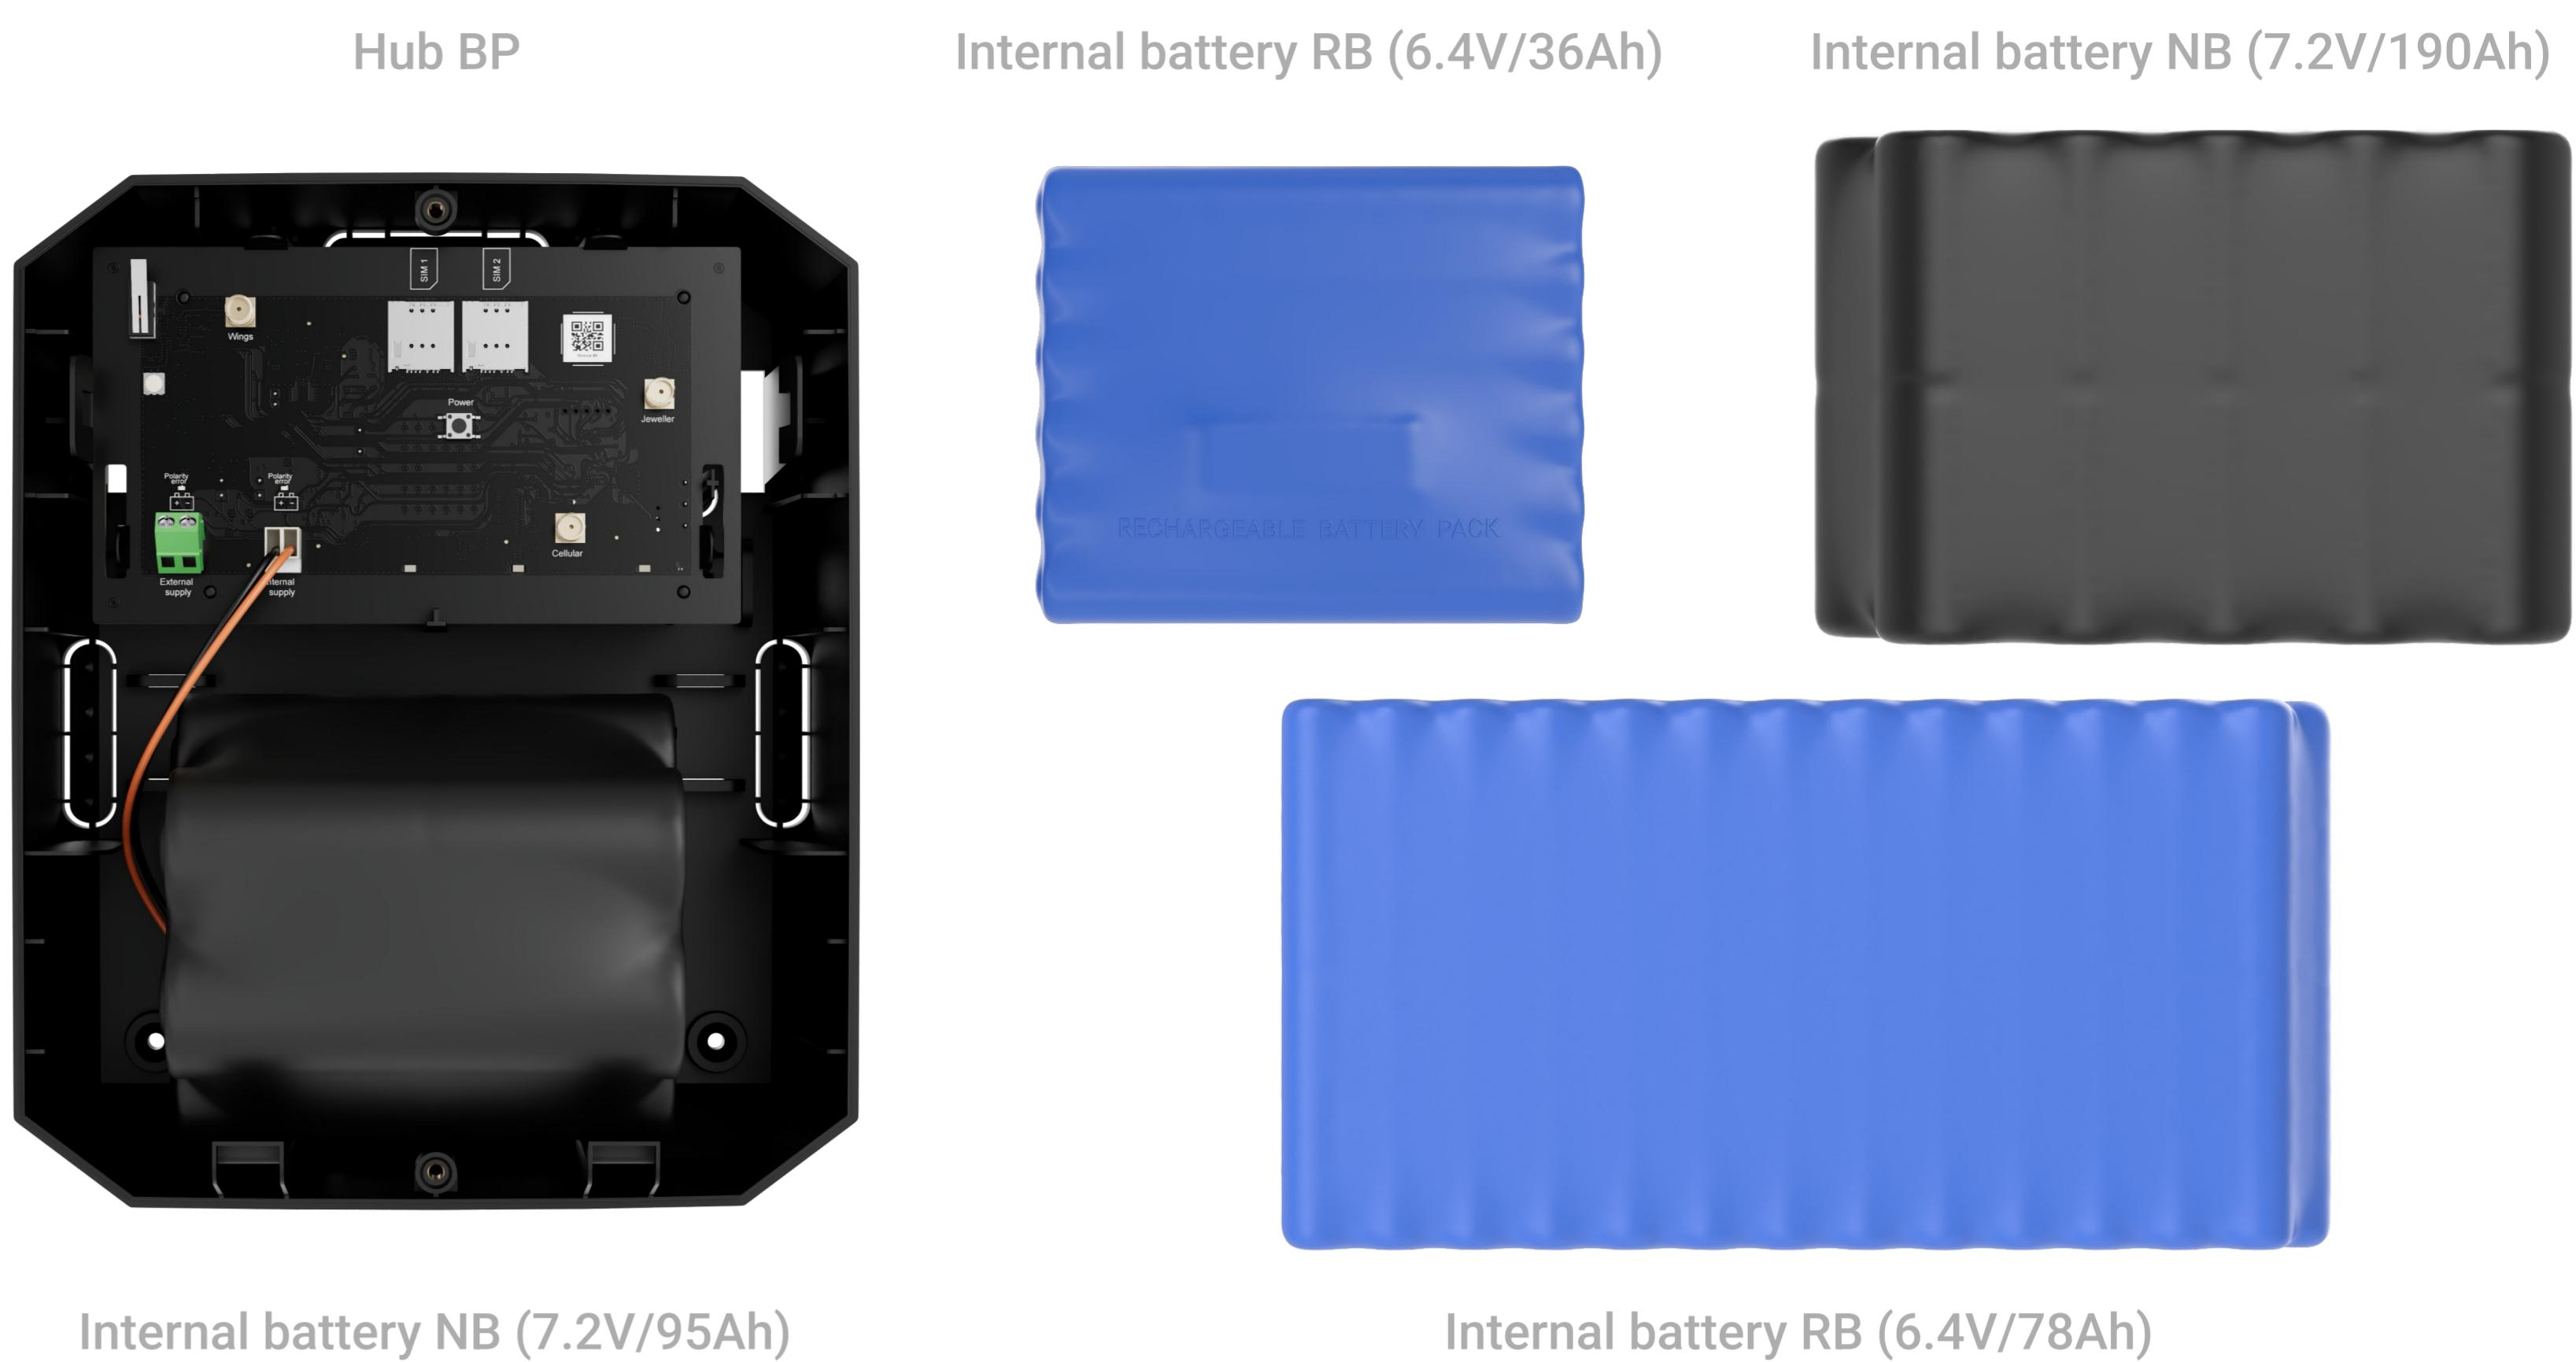

Reliable off-grid power sources

Ajax offers a range of batteries to ensure uninterrupted operation of Hub BP Jeweller at off-grid sites. Four battery versions are available: non-rechargeable ones for long-term use (from months to years) and rechargeable options for shorter, sustainable operation.

Battery versions



Internal battery NB (7.2V/95Ah)

Pack of 10 non-rechargeable LTC ER34615 batteries to install into Hub BP Jeweller



Internal battery RB (6.4V/36Ah)

Pack of 36 rechargeable LiFePO4 batteries to install into Hub BP Jeweller



Internal battery NB (7.2V/190Ah)

Pack of 20 non-rechargeable LTC ER34615 batteries to install in a compatible Ajax casing



Internal battery RB (6.4V/78Ah)

Pack of 78 rechargeable LiFePO4 batteries to install in a compatible Ajax casing

Name	Type	Quantity per pack	Voltage	Total capacity	Months of operation (Battery power saver ¹ mode)	Months of operation (full-function ¹ mode)	Installation
Internal battery NB (7.2V/95Ah)	Non-rechargeable battery (LTC ER34615)	10	7.2 V	95 Ah	23	3	Hub BP Jeweller
Internal battery RB (6.4V/36Ah)	Rechargeable battery (LiFePO4 18650)	36	6.4 V	36 Ah	8	1	Hub BP Jeweller
Internal battery NB (7.2V/190Ah)	Non-rechargeable battery (LTC ER34615)	20	7.2 V	190 Ah	46	6	Case D (430), Case E (395)
Internal battery RB (6.4V/78Ah)	Rechargeable battery (LiFePO4 18650)	78	6.4 V	78 Ah	16	2	Case D (430), Case E (395)

Built for stability and longevity

Non-rechargeable batteries

- High energy density for reliable long-term operation
- Consistent output voltage across the full charge range (from 100% down to 1%)
- Extremely low self-discharge: ≤1% per year during storage
- Up to 10 years of storage life at room temperature and up to 6 months with no impact on performance even at +30 °C (86 °F)

Rechargeable batteries

- Short-circuit protection for safe operation
- Overdischarge and overcharge protection
- Integrated balancer for consistent performance and longevity
- LiFePO4 cells for improved safety compared to traditional lithium-ion batteries

Maintenance-free and easy to handle

- Ready to use straight out of the box
- Easy to install into Hub BP Jeweller or Case D (430)
- Connected via a Molex 2139-2 connector

Dimensions and weight			
Internal battery NB (7.2V/95Ah)	Internal battery RB (6.4V/36Ah)	Internal battery NB (7.2V/190Ah)	Internal battery RB (6.4V/78Ah)
Dimensions 135 × 65 × 105 mm 5.31" × 2.55" × 4.13"	Dimensions 133 × 51 × 120 mm 5.23" × 2.01" × 4.72"	Dimensions 185 × 65 × 125 mm 7.28" × 2.55" × 4.92"	Dimensions 254 × 52 × 134 mm 10" × 2.04" × 5.27"
Weight 990 g 34.92 oz	Weight 1,515 g 57.70 oz	Weight 1,980 g 69.84 oz	Weight 3,030 g 106.88 oz
Color	Installation		Complete set
For products Internal battery NB (7.2V/95Ah), Internal battery NB (7.2V/190Ah): black	For products Internal battery NB (7.2V/95Ah), Internal battery NB (7.2V/190Ah): Operating temperature -55 °C to +85 °C -67 °F to 185 °F Operating humidity up to 85%	For products Internal battery RB (6.4V/36Ah), Internal battery RB (6.4V/78Ah): Operating temperature Charging 0 °C to +45 °C 32 °F to 113 °F Discharging -25 °C to +65 °C -13 °F to 149 °F Storage temperature -20 °C to +45 °C -4 °F to 113 °F Operating humidity up to 85%	Internal battery NB (7.2V/95Ah) Internal battery Internal battery RB (6.4V/36Ah) Internal battery Charging adapter Internal battery NB (7.2V/190Ah) Internal battery Internal battery RB (6.4V/78Ah) Internal battery Charging adapter
Load current			
For products Internal battery NB (7.2V/95Ah), Internal battery NB (7.2V/190Ah): Maximum load current 700 mA For products Internal battery RB (6.4V/36Ah), Internal battery RB (6.4V/78Ah): Maximum load current 3000 mA			

¹ Battery life estimates are based on operation at +25 °C (77 °F) with 10 paired devices in standby mode. Higher alarm activity may reduce battery life.



For detailed information, scan the QR code or follow the link:

ajax.systems/products/batteries/manuals

 support@ajax.systems

 @AjaxSystemsSupport_Bot

 ajax.systems