

Superior MotionProtect G3 Fibra

Wired PIR motion detector with an anti-masking system

This is a device of the Superior product line. Only accredited Ajax Systems partners can sell, install, and administer Superior products.



3
GRADE
EN 50131



PD 6662
2017

SSF

IN PROGRESS

INCERT

IN PROGRESS

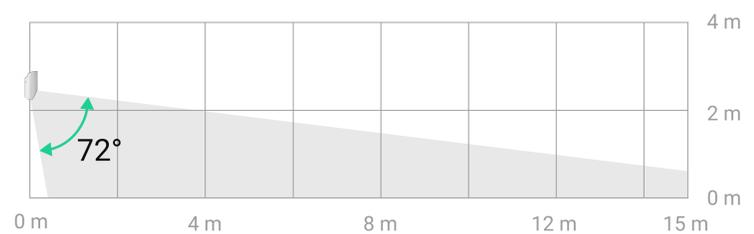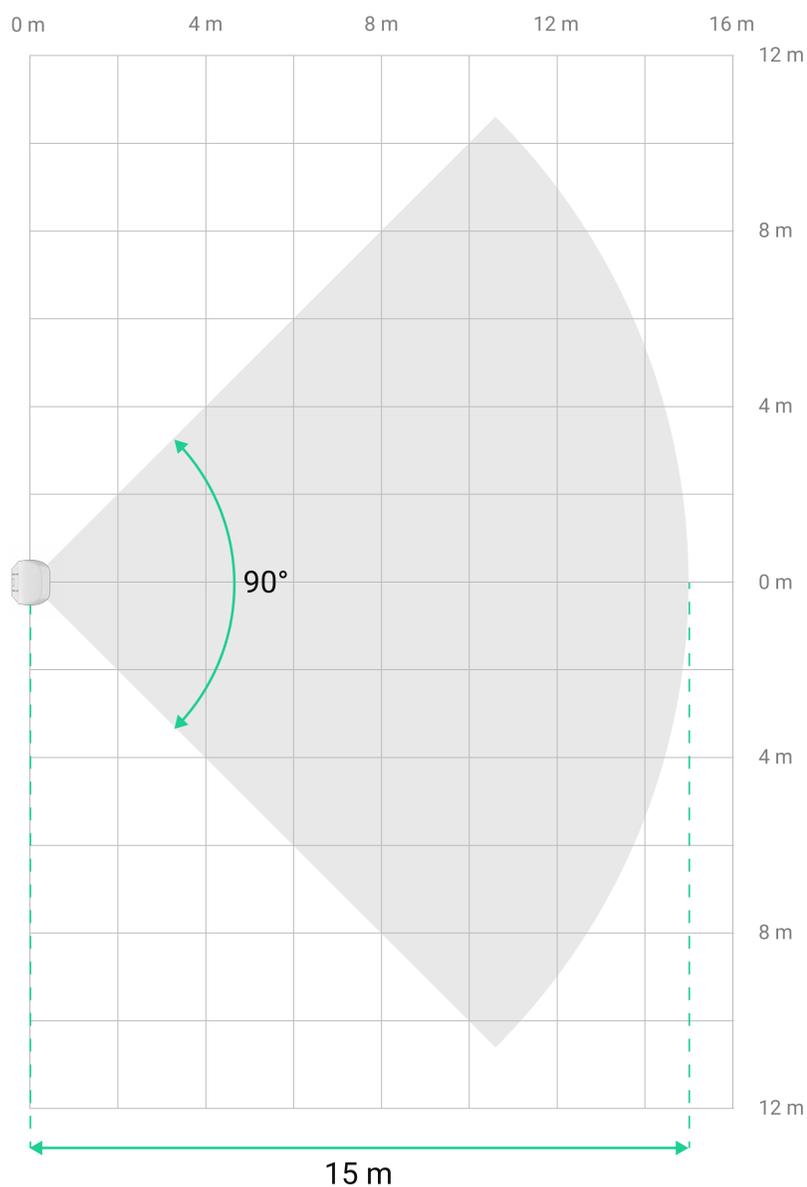

Enhanced motion detection

- Up to 15 m (49 ft) of motion detection distance
- Reduced blind zone with detecting a crawling person at a distance of up to 50 cm (1.6 ft) between the detector and the person
- Accurate response to both slow and fast movements
- Focusing IR radiation on a PIR sensor with a proprietary mirror system



False alarm prevention

- Anti-masking system with adjustable sensitivity level
- Instant identification of false alarm markers with the SmartDetect software algorithm



Fibra communication technology

- Up to 2,000 m (6,550 ft) of two-way encrypted communication
- Device authentication to prevent sabotage
- Data encryption to prevent spoofing
- Regular polling to display device states in real time



System supervision

- Self-testing of all sensitive elements to ensure the device is functioning properly
- Instant reporting of any malfunctions and connection losses to PROs and end users



Sabotage and masking protection

- Three tamper buttons
- Protection against short circuits
- Connection loss detection
- Detection of all types of masking required by Grade 3, including hindering, covering, and painting the lens



Effortless installation and configuration

- Pairing with a hub by scanning the QR code or through Fibra line scanning
- Remote configuring via a smartphone or desktop app
- Installing and maintenance without disassembling the enclosure

Superior MotionProtect G3 Fibra does not support a pet immunity feature.

<p>Compliance with standards</p> <p>EN 50131 (Grade 3) PD 6662:2017 SSF (in progress) INCERT (in progress)</p>	<p>Compatibility with hubs</p>  <p>For detailed information, scan the QR code or follow the link: ajax.systems/tools/devices-compatibility/?models=MP.G3.F</p>	<p>Communication with a hub</p> <p>Fibra communication technology</p> <p>Communication range up to 2,000 m up to 6,550 ft with U/UTP cat.5 4x2x0.51 mm (24 AWG) cable</p>	<p>Motion detection</p> <p>Sensitive elements 1 × PIR sensor</p> <p>Operation frequency 24 GHz</p> <p>Motion detection distance from 0.5 to 15 m from 1.6 to 49 ft When installed at a height of 2.4 m (7.9 ft)</p> <p>Motion detection angles vertical: 72° horizontal: 90°</p> <p>Motion detection speed from 0.1 to 4 m/s from 0.3 to 13.1 ft/s</p>
<p>Power supply</p> <p>Fibra line 7-30 V$\overline{=}$, up to 90 mW</p> <p>The hub or a Superior LineSupply Fibra module powers the detector</p>	<p>Installation</p> <p>Operating temperature range from -10 °C to +40 °C from 14 °F to 104 °F</p> <p>Operating humidity up to 75%</p> <p>Protection class IP30</p> <p>Installation height 2.4 m 7.9 ft</p>	<p>Enclosure</p> <p>Color white, black</p> <p>Dimensions 120 × 62 × 52 mm 4.72" × 2.44" × 2.05"</p> <p>Weight TBC</p>	<p>Complete set</p> <p>Superior MotionProtect G3 Fibra SmartBracket mounting panel Installation kit Quick start guide</p>



For detailed information, scan the QR code or follow the link:

ajax.systems/support/devices/superior-motionprotect-g3-fibra

- ✉ support@ajax.systems
- 📧 @AjaxSystemsSupport_Bot
- 🌐 ajax.systems