

RG-ES218GC-P

18-Port Gigabit Smart Cloud Managed PoE Switch



Highlights

- 18-port gigabit cloud managed switch with 16 PoE+ ports
- Cost-effective smart cloud managed switches
- IP Camera Recognition, unique value for CCTV network
- Automatic Loop Prevention ensures service continuity
- Lifetime management on Ruijie Cloud at anytime anywhere

Highlight Features

RG-ES200 Series Switches

Gigabit access switch fits the needs in SMB network



802.3at / 802.3af




Abundant Application Scenarios



Centralized Cloud Management

Cost-Effective Smart Cloud Managed Switches

ES200 adopts a light-weighted Cloud management design, providing faster response to support richer features.

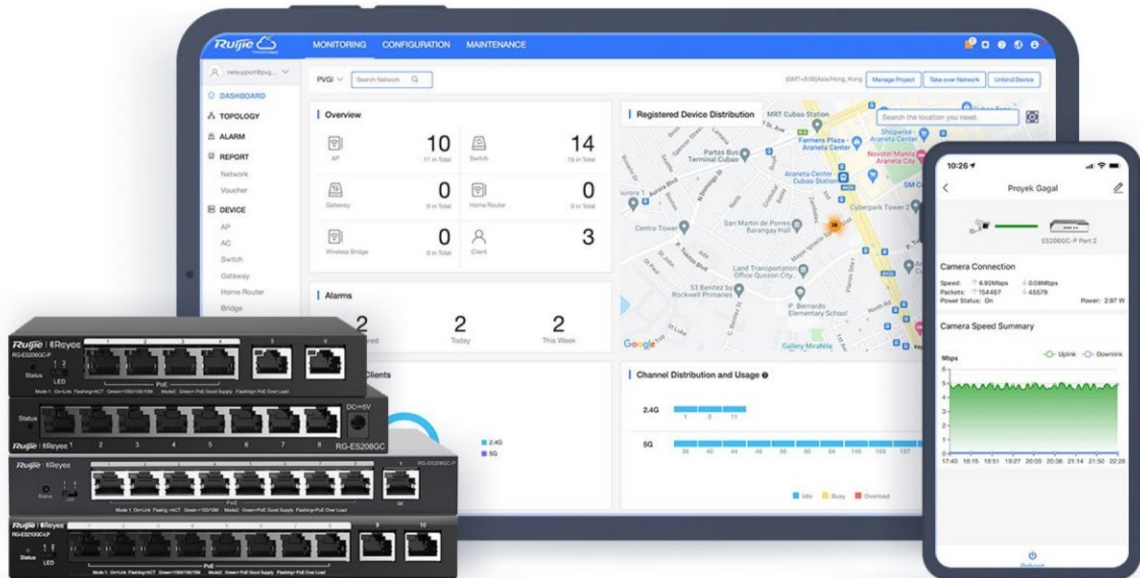

IP Camera/NVR recognition



Automatic Loop Prevention



Mobile VLAN Configuration



Intelligent PoE Adaptive

Highlight Features

Unique Value for CCTV Network

250 meters transmission*

Flexible extend mode

IPC Offline Alarm

Individual port reboot

Reboot succeeded

Automatic Loop Prevention Ensures Service Continuity

Network stays connected when network loop happens

Loop Prevention
Detects and prevents loops automatically.

PortG3
1000M 0 4.7 Reboot | More

PortG4
1000M 0.001 5.1 Reboot | More

PortG5
1000M 0.010 0.0 Reboot | More

View More

VLAN Settings

Loop Prevention
Detects and prevents loops automatically.

Cable Test

Monitor

Device Log

Delete

Reboot

Ruijie Reyee
RG-ES2050C-P

Status LED


PoE

Made in: China Link Flashing: 100% Green: 100% Good Supply Flashing: PoE On: Load

Highlight Features

Cloud, Make Your Business Easy

- SON, zero touch provisioning to Cloud
- Configure VLANs on Ruijie Cloud APP
- Monitor switch statistics at anytime anywhere
- Easy maintenance, save onsite time and cost

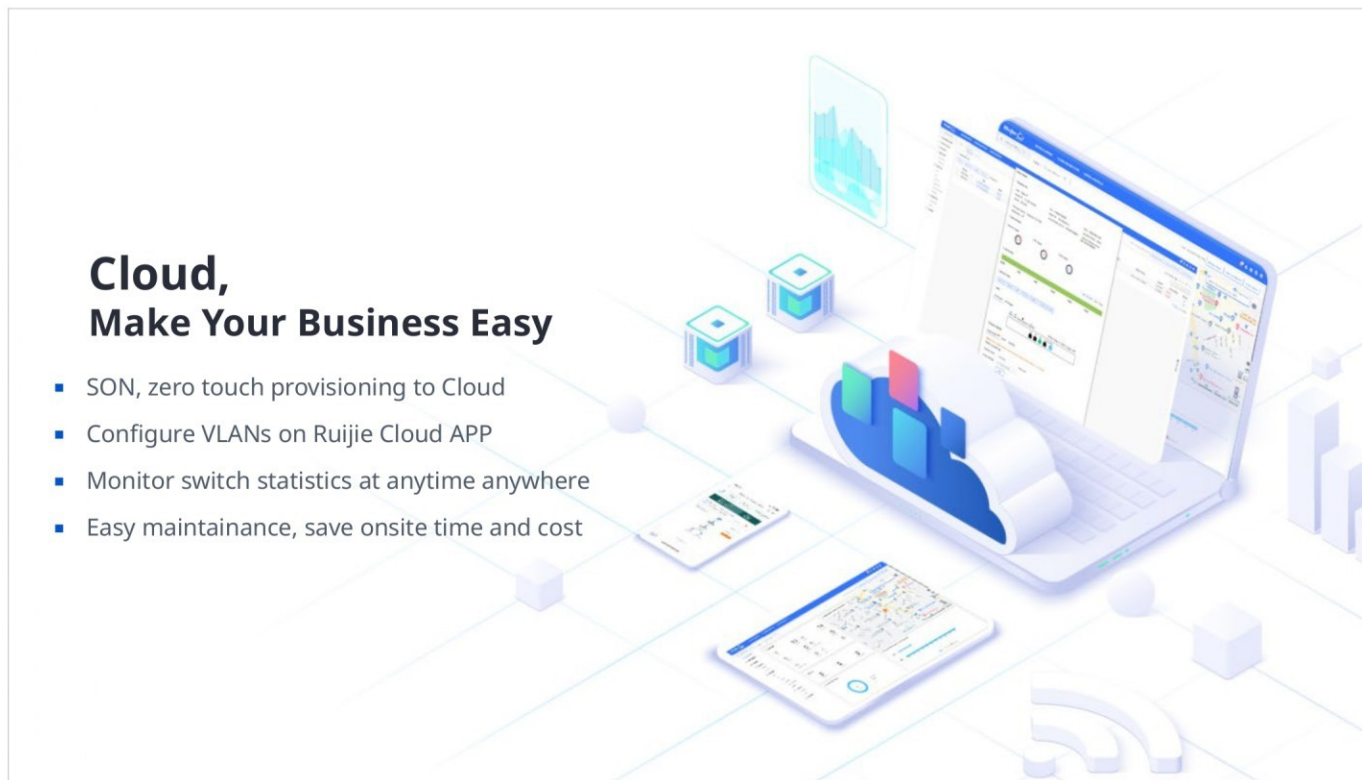

/ Product Information

Model	RG-ES218GC-P
Product Category	Layer 2

/ Hardware Specifications

Model	RG-ES218GC-P
Product Information	
Warranty	3 years
Port Specifications	
Total number of RJ45 ports	16
Total number of optical ports	2
Number of 1GE SFP ports	2
Number of 10/100/1000BASE-T ports	16
Reset button	1
DIP switch	<p>LED mode switch toggled to left (Mode 1): The port LED status indicates the status of traffic transmission. Solid green means that the port is link up, while blinking green means that the port is transmitting and receiving data.</p> <p>LED mode switch toggled to right (Mode 2): The port LED status indicates the PoE status. Solid green means that the port is supplying power, while blinking green means that the port is in power overload state.</p>
Power Supply and Consumption	
PoE Out standard	PoE/PoE+ (IEEE 802.3af/at)s
Number of PoE Out ports	16
Number of PoE/PoE+ Out ports	16
PoE budget	240 W
PoE power pins	1-2 (+), 3-6 (-)

Hardware Specifications

Model	RG-ES218GC-P
Power input	220 V AC power supply: <ul style="list-style-type: none">• Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 Hz• Maximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 Hz• Rated input current: 6 A
Maximum power consumption	15 W (with no PoE load) 255 W (with PoE full load)
Power supply	Fixed power supply
System Specifications	
Flash memory	8 MB
Forwarding rate	26.8 Mpps
Switching capacity	36 Gbps(bit/s)
Dimensions and Weight	
Casing	Metal
Product dimensions (W x D x H)	300 mm x 230 mm x 43.6 mm (11.81 in. x 9.06 in. x 1.72 in.)
Weight	2.99 kg (6.59 lbs) (without packaging materials) 3.50 kg (7.72 lbs) (with packaging materials)
Shipping weight	3.50 kg (7.72 lbs)
Environment and Reliability	
Fan	1 x fixed fan
Cooling	Air cooling, front-to-rear airflow
Acoustic noise	< 45 dB: 25°C(77°F)
Mounting options	Rack
Hot swapping of cables	Hot swapping supported by the service port and power connector
MTBF	200,000 hours
Operating temperature	0°C to 40°C (32°F to 104°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	10% RH to 90% RH (non-condensing)

Hardware Specifications

Model	RG-ES218GC-P
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	-500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.)
ESD protection	Air discharge: 6 kV Contact discharge: 4 kV
Surge protection	Service port: ± 4 kV for common mode Power connector: ± 6 kV for common mode and ± 6 kV for differential mode
Certification and Regulatory Compliance	
EMC	EN 55032 EN 61000-3-2 EN 61000-3-3 EN 55035 EN 300 386
Safety compliance	EN 62638-1
Certification	CE, FCC

Software Specifications

Model	RG-ES218GC-P
Authentication	
RADIUS	No
802.1X authentication	No
Basic Configurations	
PoE watchdog	Yes
Online upgrade	Yes
Ethernet Switching	
Maximum number of VLANs	16
Maximum number of MAC address entries	8000
Interface flow control	Yes
IEEE 802.1Q VLAN	Yes
VLAN configuration supported on LAN ports	Yes
LLDP	No
LLDP-MED	No
Static MAC address	Yes
Static aggregation	No
LACP	No
Inbound or outbound rate limiting based on interface traffic	Yes
Gateway Features	
802.1p priority-based traffic classification	No
DSCP priority-based traffic classification	No
Interface	

Software Specifications

Model	RG-ES218GC-P
Jumbo frame length (MTU)	10000 bytes
EEE	No
Cable test	Yes
IP Routing	
IPv4 static route	No
IPv6 static route	No
OSPFv2	No
OSPFv3	No
IP Service	
ARP	No
IPv4 ping	No
IPv4 traceroute	No
ICMPv6	No
IPv6 ping	No
IPv6 traceroute	No
DNS client	Yes
DHCP client	Yes
Multicast	
IGMPv1 snooping	No
IGMPv2 snooping	No
Basic IGMPv3 snooping	No
Full IGMPv3 snooping	No
IGMP filtering	No
IGMPv1, v2, and v3	No

Software Specifications

Model	RG-ES218GC-P
Network Management and Monitoring	
Fan speed adjustment	Automatic speed adjustment
Mirroring	Yes
HTTP login	Yes
HTTPS login	No
SON	Yes
Syslog	No
Camera detection	Yes
eWeb management	Yes
Ruijie Cloud management	Yes
Ruijie Reyee App management	Yes
SNMPv1, v2c, and v3	No
Security	
Port isolation	Yes
Broadcast storm control	Yes
Multicast storm control	Yes
Unknown unicast storm control	Yes
DHCP snooping	Yes
Standard ACL	No
Extended MAC ACL	No
Extended IP ACL	No
IPv6 ACL	No
ARP anti-spoofing	No
CPU Protection Policy	Yes

Software Specifications

Model	RG-ES218GC-P
System Performance Capacity	
Recommended camera limit	200W H265: 80 400W H265: 40

Package Contents

Model	RG-ES218GC-P
Accessories	
Rubber pad	4
Screw	8 X M3 x 6 mm cross recessed countersunk head screws
Rack-mount bracket	2
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 Redefine your easy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>