

RG-RAP2260(H)

Reyee Wi-Fi 6 AX6000 High-density Multi-G Ceiling Access Point




Highlights

- Build ultra-fast and high-density Wi-Fi with 5.95Gbps throughput.
- Client connections over 500, higher practical performance as well.
- Boost Internet speed with 5Gbps uplink for the future.
- Easily install extra AP with Reyee Mesh technology.
- Support standalone captive portal, easy to enable Wi-Fi authentication.

Highlight Features

Build Ultra-fast Wi-Fi Network for the Future

Interface Installation



WIFI 6 AX6000 Wi-Fi 6

4x4 MIMO 4 x 4 MU-MIMO

Dual 2.5GE Wired Uplink

Reye Mesh Technology

Free Cloud Management

Build Ultra-fast Wi-Fi Network for the Future

Interface Installation



WIFI 6 AX6000 Wi-Fi 6

4x4 MIMO 4 x 4 MU-MIMO

Dual 2.5GE Wired Uplink

Reye Mesh Technology

Free Cloud Management

Better Multi-User Experience in High-Density Scenarios

Performance upgraded, support client connections over 500.



Users 500

4x4 MIMO

2.4G 5G

Highlight Features

Boost Your Internet Speed with 5Gbps Uplink

Can be integrated dual 2.5GE uplink, build network for future.

Wireless 5952 Mbps

Wired 5000 Mbps

5Gbps

Easily Install Extra AP with Reye Mesh


Less wiring, more relaxing.



Highlight Features

More Flexiabe Wi-Fi Authentication


Support standalone captive portal, easy to enable Wi-Fi authentication based on Ruijie Cloud only.*

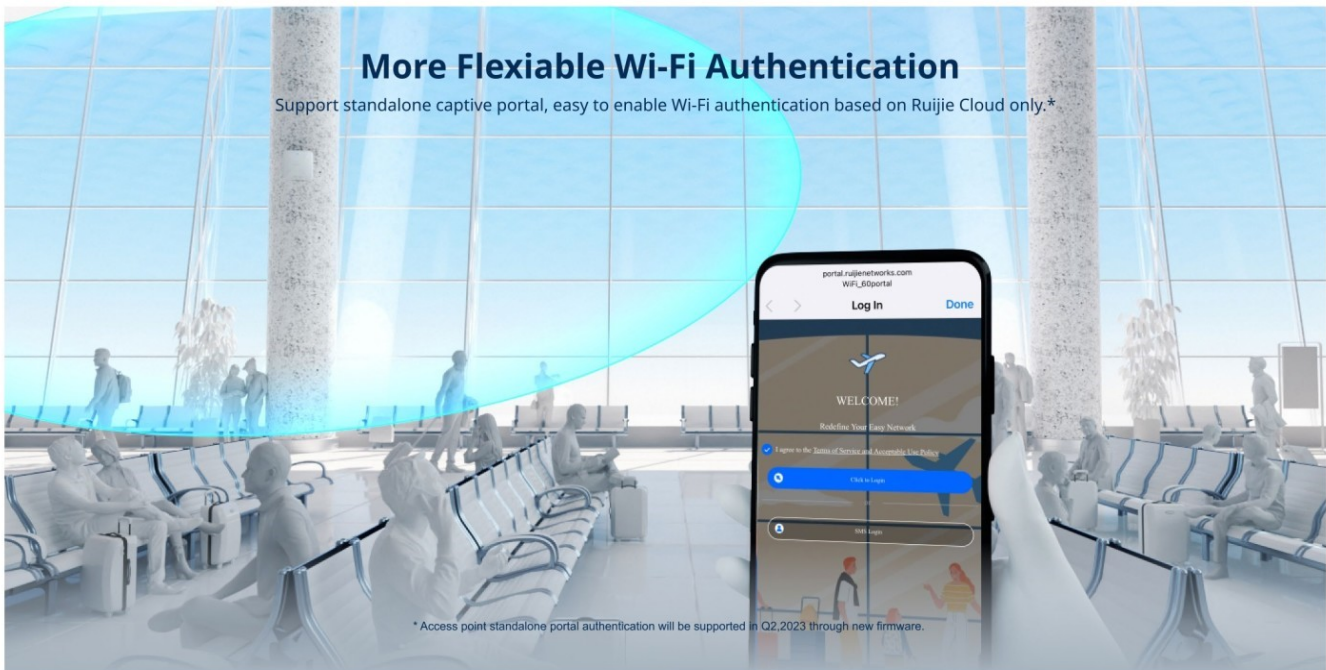

* Access point standalone portal authentication will be supported in Q2.2023 through new firmware.

Cloud, Make Your Business Easy

- Self-organizing network
- Centralized network management
- Scenario based configuration
- Cloud portal authentication
- Remote monitoring and maintenance

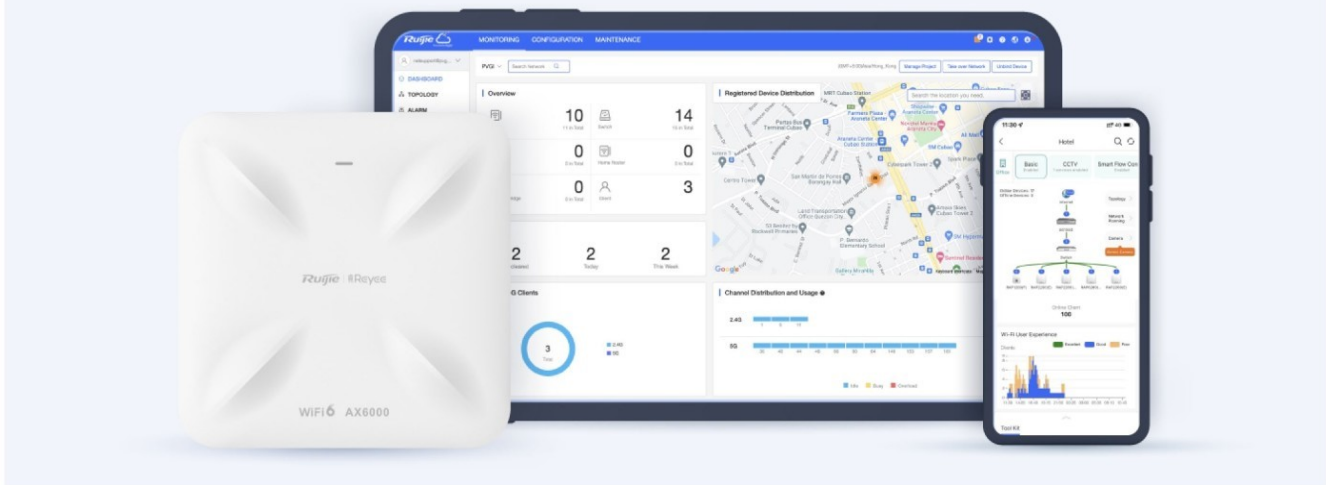

The image shows a white Ruijie WiFi AX6000 access point in the foreground. Behind it is a tablet displaying the Ruijie Cloud management interface. The interface includes a navigation menu with 'MONITORING', 'CONFIGURATION', and 'MAINTENANCE'. The main content area shows an overview with statistics: 10 APs, 14 APs, 0 APs, and 3 APs. There is also a 'Registered Device Distribution' map and a 'Channel Distribution and Usage' chart. A smartphone in the foreground shows a mobile version of the interface with a 'Hotel' scenario configuration screen.

Product Information

Model	RG-RAP2260(H)
Product Type	Ceiling AP

Hardware Specifications

Model	RG-RAP2260(H)
Wi-Fi Radio	
6 GHz Wi-Fi	No
5 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11a/n) Wi-Fi 5 (IEEE 802.11ac) Wi-Fi 6 (IEEE 802.11ax)
2.4 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11b/g/n) Wi-Fi 6 (IEEE 802.11ax)
Operating band	IEEE 802.11b/g/n/ax, 2.400 GHz to 2.4835 GHz IEEE 802.11a/n/ac/ax, 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands.
Radio design	Dual-radio 8 spatial streams • 2.4 GHz: 4 x 4, MU-MIMO • 5 GHz: 4 x 4, MU-MIMO
FEM	2.4 GHz: 4 x eFEM 5 GHz: 4 x eFEM
6 GHz channel width	No
5 GHz channel width	Auto/20/40/80/160 MHz
2.4 GHz channel width	Auto/20/40 MHz
Maximum wireless data rate	5950 Mbps
6 GHz wireless data rate	No
5 GHz wireless data rate	4803 Mbps
2.4 GHz wireless data rate	1147 Mbps

Hardware Specifications

Model	RG-RAP2260(H)
Maximum transmit power	<p>Frequency bands and maximum Effective Isotropic Radiated Power (EIRP):</p> <p>Note: Country specific restrictions apply.</p> <p>European Union & United Kingdom: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5150–5350 MHz, EIRP ≤ 23 dBm 5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>United States: 2400–2483.5 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm 5150–5250 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm 5250–5350 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm 5470–5725 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm 5725–5850 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm</p> <p>Myanmar: 2400–2483.5 MHz, EIRP ≤ 23 dBm 5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Thailand: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5150–5350 MHz, EIRP ≤ 23 dBm 5470–5725 MHz, EIRP ≤ 30 dBm 5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Indonesia: 2400–2483.5 MHz, EIRP ≤ 27 dBm 5150–5350 MHz, EIRP ≤ 23 dBm 5725–5825 MHz, EIRP ≤ 23 dBm</p> <p>Egypt: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>Vietnam: 2400–2483.5 MHz, EIRP ≤ 23 dBm 5150–5350 MHz, EIRP ≤ 23 dBm 5470–5725 MHz, EIRP ≤ 30 dBm 5725–5850 MHz, EIRP ≤ 30 dBm</p>
Maximum transmit power (6 GHz)	No
Maximum transmit power (5 GHz)	<p>Combined power: 32 dBm (single-stream power: 26 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Maximum transmit power (2.4 GHz)	<p>Combined power: 32 dBm (single-stream power: 26 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Coverage range	<p>190 m² (2045.14 square ft.)</p> <p>Note: The data is obtained in an ideal environment without</p>

Hardware Specifications

Model	RG-RAP2260(H)
	obstruction. The signal coverage radius depends on client performance and environmental interference.
Modulation	OFDM: BPSK @ 6/9 Mbps, QPSK @ 12/18 Mbps, 16-QAM @ 24 Mbps, 64-QAM @ 48/54 Mbps DSSS: DBPSK @ 1 Mbps, DQPSK @ 2 Mbps, and CCK @ 5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM and 1024-QAM OFDMA
Receive sensitivity	11b: -91 dBm (1 Mbps), -88 dBm (5.5 Mbps), -85 dBm (11 Mbps) 11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps) 11n: -83 dBm (MCS0), -65 dBm (MCS7), -83 dBm (MCS8), -65 dBm (MCS15) 11ac: 20 MHz: -83 dBm (MCS0), -57 dBm (MCS9) 11ac: 40 MHz: -79 dBm (MCS0), -57 dBm (MCS9) 11ac: 80 MHz: -76 dBm (MCS0), -51 dBm (MCS9) 11ac: 160 MHz: -76 dBm (MCS0), -50 dBm (MCS9) 11ax: 20 MHz: -85 dBm (MCS0), -58 dBm (MCS11) 11ax: 40 MHz: -82 dBm (MCS0), -54 dBm (MCS11) 11ax: 80 MHz: -79 dBm (MCS0), -52 dBm (MCS11) 11ax: 160 MHz: -76 dBm (MCS0), -49 dBm (MCS11)
Antenna	
Antenna	2.4 GHz: 4 built-in omnidirectional antennas 5 GHz: 4 built-in omnidirectional antennas
Antenna horizontal orientation	No
Antenna vertical orientation	No
Antenna gain (6 GHz)	No
Antenna gain (5 GHz)	4.00 dBi
Antenna gain (2.4 GHz)	3.00 dBi
Dimensions and Weight	
Product dimensions (W x D x H)	230 mm x 230 mm x 49.5 mm (9.06 in. x 9.06 in. x 1.95 in.) (excluding the mounting bracket)
Color	White
Weight	≤ 1.36 kg (3.00 lbs.) (without packaging materials)

Hardware Specifications

Model	RG-RAP2260(H)
Shipping weight	≤ 1.72 kg (3.79 lbs.)
Port Specifications	
Number of 10/100/1000/2500BASE-T ports	2
Reset button	1
LEDs	1 x system status LED
Power Supply and Consumption	
Power supply	<ul style="list-style-type: none">• DC power adapter• PoE+/PoE++ Note: If both the DC power adapter and PoE+/PoE++ are available for power supply, the DC power adapter is preferred.
Local power supply	Yes, one DC power connector (48 V, 1 A)
Dimensions of the DC connector	Outer diameter: 5.5 mm (0.22 in.) Inner diameter: 2.1 mm (0.08 in.) Depth: 10 mm (0.39 in.)
PoE In standard	<ul style="list-style-type: none">• IEEE 802.3at (PoE+) Note: Radio transmission and reception is limited to 2T2R at 2.4 GHz and 5 GHz. <ul style="list-style-type: none">• IEEE 802.3bt (PoE++)
PoE budget	No
Maximum power consumption	40 W
Environment and Reliability	
Operating temperature	0°C to 40°C (32°F to 104°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	5% RH to 95% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Mounting options	Ceiling/Wall
IP rating	No
Surge protection	Ethernet port: ±2 kV for common mode
MTBF	400,000 hours

Hardware Specifications

Model	RG-RAP2260(H)
Certification and Regulatory Compliance	
RoHS	Yes
Safety compliance	EN 62368-1
EMC	EN 55032 EN 55035 EN 61000-3-3 EN 61000-3-2 EN 301489-1 EN 301489-3 EN 301489-17
RF	EN 300 328 EN 301 893 EN 300 440
Certification	CE, FCC, CB, ISED, cTUVus
System Specifications	
Flash memory	256 MB
RAM	512 MB DDR3

Software Specifications

Model	RG-RAP2260(H)
Basic Configurations	
AP mode	Yes
Routing mode	Yes
Internet access mode	Static IP address Static IPv6 address Dynamic IP address Dynamic IPv6 address PPPoE
Interface	
IPTV transparent transmission	No
Ethernet Interface	
PPPoE clients	Yes
Ethernet Switching	
IEEE 802.1Q VLAN	Yes
WLAN	
Maximum number of associated wireless clients	64 (2.4 GHz) 512 (5 GHz) 512 (2.4 GHz and 5 GHz enabled)
Recommended number of associated wireless clients	<ul style="list-style-type: none"> ● Support for IEEE 802.11ax and 160 MHz: <ul style="list-style-type: none"> 16 (2.4 GHz) 114 (5 GHz) 130 (2.4 GHz and 5 GHz enabled) ● Support for IEEE 802.11ax and 80 MHz: <ul style="list-style-type: none"> 16 (2.4 GHz) 104 (5 GHz) 120 (2.4 GHz and 5 GHz enabled) <ul style="list-style-type: none"> ● Support for IEEE 802.11ac: <ul style="list-style-type: none"> 16 (2.4 GHz) 64 (5 GHz) 80 (2.4 GHz and 5 GHz enabled)
Maximum number of SSIDs	8
Radio-based client limiting	Yes
Layer 2 isolation	Yes

Software Specifications

Model	RG-RAP2260(H)
OFDMA	Yes
WMM	Yes
DFS	Yes
MLO	No
4K-QAM	No
Different SSIDs for the same VLAN	Yes
Enabling/Disabling MLO	No
AP load balancing	Yes
Beamforming	Yes
802.11k/v roaming	Yes
Fast transition (802.11r)	Yes
Layer 2 roaming	Yes
Layer 3 roaming	Yes
AI roaming	Yes
PSK authentication	Yes
Static allowlist	Yes
Adjusting the transmit power for beacon and probe frames	Yes
Encryption mode (WPA-PSK, WPA2-PSK, WPA/WPA2-PSK)	Yes
OWE (Enhanced Open) WPA3-SAE	Yes
WPA2-PSK/WPA3-SAE	
Number of blocklists and allowlists based on MAC addresses (single SSID)	256
Number of global blocklists/allowlists	256

Software Specifications

Model	RG-RAP2260(H)
Mesh management	Yes
AP Mesh	Yes
AP portal authentication	Yes
Maximum number of devices that can be managed	300
One-Click Network Optimization	Yes
Static blacklist	Yes
IP Service	
ARP binding	Yes
IPv4 ping	Yes
IPv6 ping	Yes
Traceroute	Yes
Static/Dynamic NAT	Yes
DHCP server	Yes
IPv6	Yes
Authentication	
802.1X authentication	Yes
Network Management and Monitoring	
Wireless repeater mode	Yes
Web login information	Single-device login address: 10.44.77.254 Network-wide login address: 10.44.77.253 Default password: admin
Network-wide configuration and management	Yes
Ruijie Reyee App management	Yes
eWeb management	Yes
Ruijie Cloud management	Yes

Software Specifications

Model	RG-RAP2260(H)
SNMP	Yes
Configuration synchronization among the app, eWeb, and Ruijie Cloud	Yes
Displaying device information on Ruijie Cloud	Yes

Package Contents

Model	RG-RAP2260(H)
Package Contents	
Package Contents	1 x AP 1 x Mounting bracket 4 x Cross pan head screws (ST4.2 x 20 mm) 4 x Plastic expansion anchors (ϕ 9 x 25.4 mm) 1 x User Manual 1 x Warranty Card 1 x Key to security lock
Accessories	
Power adapter	No

Ruijie | ReYee

 Redefine your easy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>