


When sticking the sticker paper, this frame line needs to be coincided with expansion module 3’s right frame line.

Align the top edge of the expansion module 4 to the reference line when installing




Before installation:
Use a level to stick the sticker paper horizontally on a flat wall to ensure that the paper has no wrinkles.


Expansion Module 4

Step1: Use a 12 mm drill to drill holes at the cross cursors of A1 and A2 as shown in the paper, and strike expansion bolts in the wall.



Step2: Insert self-tapping screws in the expansion bolts of A1 and A2. When installing, make sure that the screw is perpendicular to the wall, and reserve 10 mm-15 mm distance in case that the station needs to be moved slightly.

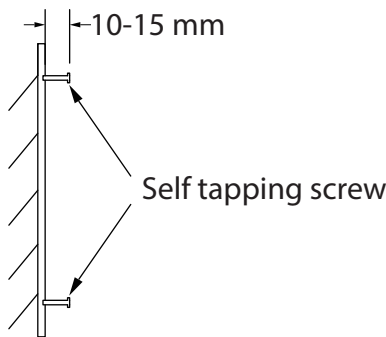

Step 3: Align the left and bottom sides to the reference lines on the sticker paper. Align the hardy holes on the rear panel with A1 and A2 self-tapping screws, and slide the expansion module to the left to insert the expansion module positioning column into the positioning hole of expansion module 3.

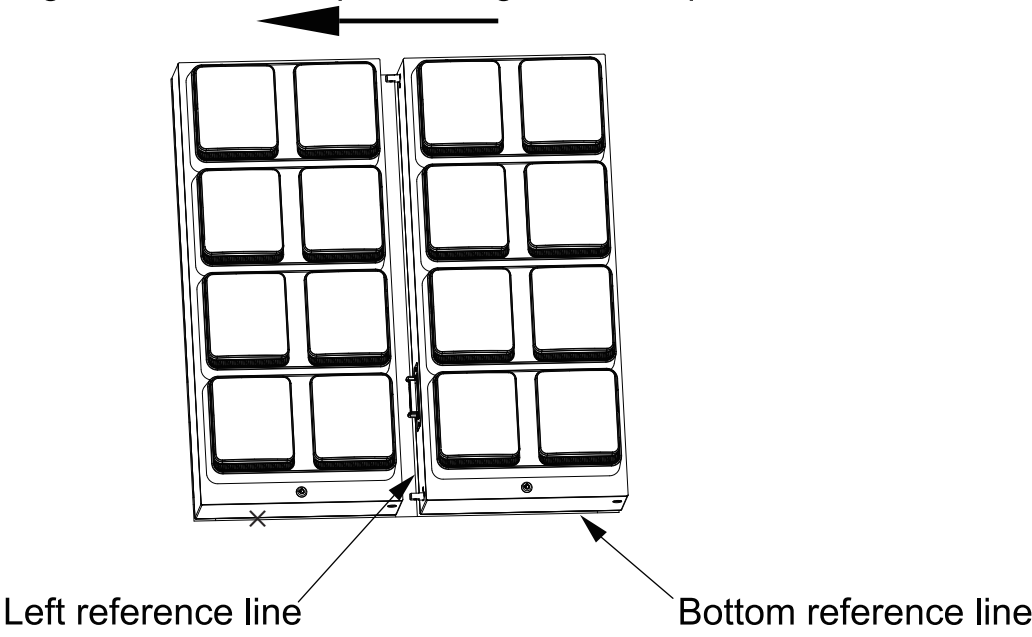

Step 4: Use M4×14 screws to tighten the two modules.

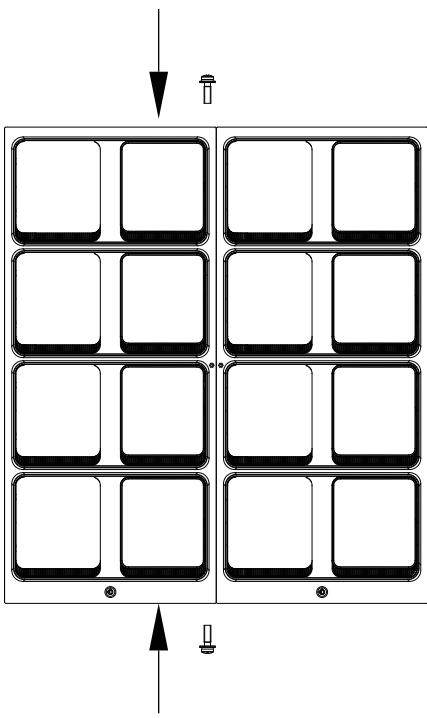

Align the bottom edge of expansion module 4 to the reference line when installing.

